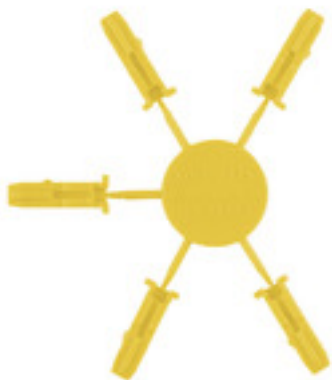


KOSF ZT2.5**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Through the use of coding pins, individual coding options ensure trouble-free plug-in connection.

General ordering data

Version	Z-series, Coding element, yellow, 2.9 mm
Order No.	1816150000
Type	KOSF ZT2.5
GTIN (EAN)	4032248370726
Qty.	50 pièce(s)

KOSF ZT2.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Caractéristiques techniques

Dimensions and weights

Depth	11,25 mm	Depth (inches)	0,443 inch
Height	4,4 mm	Height (inches)	0,173 inch
Width	2,9 mm	Width (inches)	0,114 inch
Net weight	0,2 g		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

Material data

Material	PA 66 GF 30	Colour	yellow
UL 94 flammability rating	HB		

System specifications

Version	Coding element
---------	----------------

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Type of fixing	Plugged		

General

Installation advice	Direct mounting
---------------------	-----------------

Classifications

ETIM 6.0	EC002848	ETIM 7.0	EC002848
ETIM 8.0	EC002848	ETIM 9.0	EC002848
ECLASS 9.0	27-14-11-92	ECLASS 9.1	27-14-11-92
ECLASS 10.0	27-14-11-92	ECLASS 11.0	27-14-11-92
ECLASS 12.0	27-14-11-92	ECLASS 13.0	27-25-03-90
ECLASS 14.0	27-25-03-90		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	CAD data – STEP
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format
Brochures	

KOSF ZT2.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Dessins

