Weidmüller ⫶⫶

TS 32X15/LL 2M/ST/ZN

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

General ordering data

Version	Terminal rail, Accessories, Steel, galvanic zinc plated and passivated, Width: 2000 mm, Height: 33 mm, Depth: 15 mm, Slit width: 5.20 mm, Slit length: 25.00 mm
Order No.	0514400000
Type	TS 32X15/LL 2M/ST/ZN
GTIN (EAN)	4008190086152
Qty.	2 m

TS 32X15/LL 2M/ST/ZN

Caractéristiques techniques

Dimensions and weights

Depth	15 mm	Depth (inches)	0,591 inch
Height	33 mm	Height (inches)	1,299 inch
Width	2 000 mm	Width (inches)	78,74 inch
Net weight	667 g		

Mounting rail

Drill-hole diameter	5,2 mm		
Installation advice	Direct mounting		
Length of the terminal rail	min.	0 mm	
	nominal	2 000 mm	
	max.	2 000 mm	
Material	Steel		
Pre-punched mounting rail	Yes		
Short circuit strength corresponds to E-Cu wire	35 mm²		
Short-time withstand current per second according to IEC 60947-7-2	4,2 kA		
Slit gap	11 mm		
Slit gap			
Slit length	25 mm		
Slit length			
Slit width	5,2 mm		
Slit width			
Slotted drill holes	Yes		
Solder eyelet hole diameter (D)	5,2 mm		
Spacing of holes, centre-to-centre	36 mm		
Standards	DIN EN 60715		
Surface finish	galvanic zinc plated and passivated		
Thickness	1,5 mm		

Classifications

ETIM 6.0	EC001285	ETIM 7.0	EC001285
ETIM 8.0	EC001285	ETIM 9.0	EC001285
ECLASS 9.0	27-40-06-02	ECLASS 9.1	27-40-06-02
ECLASS 10.0	27-40-06-02	ECLASS 11.0	27-40-06-02
ECLASS 12.0	27-40-06-02	ECLASS 13.0	27-40-06-02
ECLASS 14.0	27-40-06-02		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

ROHS	Conform

Downloads

Engineering Data	CAD data – STEP
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format
Brochures	

Date de création 26 novembre 2024 13:29:08 CET

TS 32X15/LL 2M/ST/ZN

Dessins

Product image

1,5 mm

15 mm

32 mm
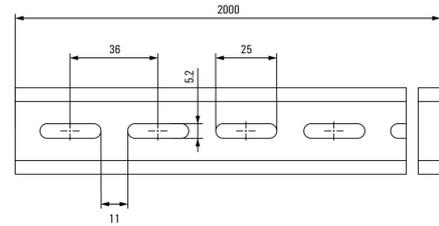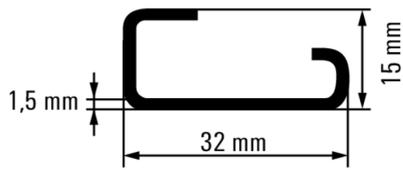
Similar to illustration

2000

36

25

5,2

11