

Prism Mini RL-PRISM-22-BK

Recessed Light

Product Finishes: ■



Specifications:

Voltage: 12V AC

Wattage: 0.2

Volt Amps: 0.3

Lumens: 3

Color Temp: 2700k

IP Rating: 67

CRI: 93

Light Source: Integrated

Material: Polycarbonate

Cable Length: 36"

Lux (lx): 0.4

Candelas (cd): 1.43

Rated Life: 50,000 hours

Warranty: 7-year comprehensive

Dimmable: No

Color-Changing: No


Drive-Over Rated: Yes

Product Uses:


Decks, Pathways, Pavers,
Stairs, Risers, Concrete

Accessories:

Fang Mini

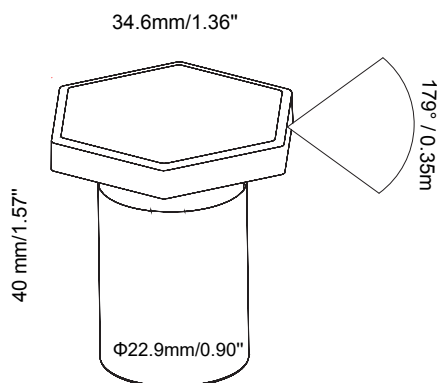

Max. Luminous intensity : 1.43 cd

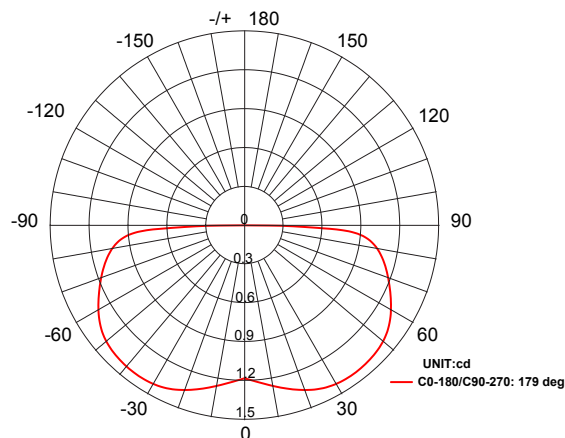

AVERAGE BEAM ANGLE 90/270 (50%): 179 DEG

AVERAGE BEAM ANGLE 0/180 (50%): 179 DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	0.193/14.16		0.84
1.5	0.23/1.69		1.58
3	0.012/0.86		2.21
5	0.006/0.47		3.50
6.5	0.002/0.11		6.83

AVERAGE BEAM ANGLE 90/270 (50%): 179 DEG

AVERAGE BEAM ANGLE 0/180 (50%): 179 DEG



support@boldpros.com | 1-833-472-9960

boldpros.com