

VuLite®

5" IC REMODEL HOUSING

INCANDESCENT LAMPS

V5ICRW

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing
 • Can be completely covered with insulation • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below
 • Secured in place by factory installed remodel springs • When used with Air-Loc Gasket (see accessories), stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol  do not require a gasket.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell • Floating socket with spring attaches to trim for installation
 • Shipped with socket cap to protect against paint overspray.

Trims Trim selection shown on reverse.

Labels UL/cUL listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps • UL/cUL Listed • Trim V2010 is wet location approved for covered ceiling applications • Trims V2015 and V2016 are wet location approved for covered ceiling applications, **when used with outdoor rated PAR lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

INSTALLATION



Junction Box Pre-wired junction box, UL/cUL listed for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts and (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots • Push-in electrical connectors included.

Housing IC housing, .03" aluminum sealed for Air-Loc Compliance • Remodel spring accommodate up to 1 ½" ceiling thickness.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
V5ICRW	120V	PAR30/PAR30L/BR30/R20/PAR20 (See reverse for max. trim rating)

DIMENSIONS

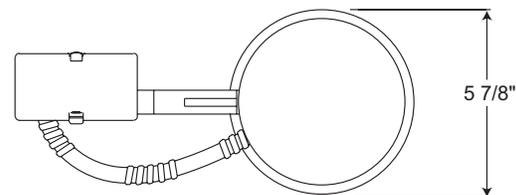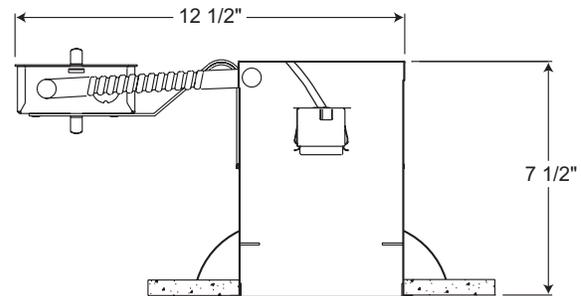

5 1/2" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
ALG5R	Air-Loc Gasket

To order, specify catalog number.

5" IC REMODEL HOUSING

INCANDESCENT LAMPS

V5ICRW

TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
		V2015W-WH◆◆ White Baffle V2015B-WH◆◆ Black Baffle	75W PAR30 (with socket extender), 75W PAR30L, 65W BR30, 50W PAR30 (black only)
		V2016W-WH◆◆ White Cone V2016C-WH◆◆ Clear Cone	75W PAR30 (with socket extender), 75W PAR30L, 65W BR30
		V2010-WH◆ Stippled Opal Lens Shower with Reflector	35W PAR30L
		V2029-WH R/PAR20 Eyeball - White	50W R20, 50W PAR20
		V2030-WH PAR30 Eyeball - White	75W PAR30

Trim Size: V2015, V2016 and V2029 - 6¼" O.D. V2010 and V2030 - 6½" O.D.

Trim Finish: WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

- ◆ UL/cUL Listed for use in wet location.
- ◆◆ UL/cUL Listed for use in wet location with outdoor rated PAR lamp.

 Vulite IC housings meet IECC Energy Code requirements per ASTM E283.
Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.