




ILSCON® Disconnect Terminals Fully Insulated

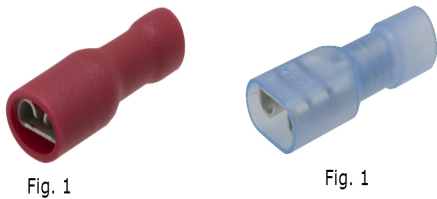

- Female and male disconnect configurations
- Indusry standard sizes
- Fully insulated
- Color coded
- Funnel wire entry
- Vinyl insulation - VFIDT
- Nylon insulation - NFIFT, NFIMT
- Manufactured from high strength brass alloy
- Electro-tin plated
- UL Listed
- Allows for reliable, easy, and quick connection/disconnection
- Mates with matching tab sizes to ensure a firm grip
- Provide easy wire range identification
#18-22 AWG Red
#14-16 AWG Blue
#10-12 AWG Yellow
- Offers maximum conductivity
- Provides low contact resistance
- Smooth wire insertion into barrel
- Ensures reliability for brass conductor
- Provides corrosion resistance and strain relief
- Increased heat and chemical resistant qualities for more demanding applications

<I>All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
Tested to UL 310, UL File E474613</I>

Item ID	Figure Number	Conductor Range	Voltage	Temperature Rating	Length	Width	Height	Tab Size	Installation Tooling ILST-22K	Package Quantity
VFIDT-18-187-P 50	1	18-22	300 V	75°C	0.768	0.197	0.252	.187 x .020	Die Set C	50



ILSCON® Disconnect Terminals Fully Insulated

Item ID	Figure Number	Conductor Range	Voltage	Temperature Rating	Length	Width	Height	Tab Size	Installation Tooling ILST-22K	Package Quantity
VFIDT-10-250-P 25	1	10-12	300 V	75°C	0.957	0.26	0.295	.250 x .032	Die Set C	25
NFIFT-18-250-P 50	1	18-22	300 V	105°C	0.886	0.26	0.295	.250 x .032	Die Set C	50
NFIFT-14-250-P 50	1	14-16	300 V	105°C	0.866	0.26	0.295	.250 x .032	Die Set C	50
NFIFT-10-250-P 25	1	10-12	300 V	105°C	0.945	0.26	0.295	.250 x .032	Die Set C	25
NFIMT-18-250-P 25	2	18-22	300 V	105°C	0.945	0.25	0.303	.250 x .032	Die Set C	25
NFIMT-14-250-P 25	2	14-16	300 V	105°C	0.945	0.25	0.303	.250 x .032	Die Set C	25
NFIMT-10-250-P 25	2	10-12	300 V	105°C	0.984	0.25	0.303	.250 x .032	Die Set C	25