

Low Profile LED Downlights



LPDL



The perfect solution when space is limited.

The LPDL downlights are perfect for all types of small spaces and suitable for almost any residential or commercial indoor lighting applications.

- ▶ Solving the problem of limited ceiling space with a thickness of less than 1"
- ▶ Variety of options for shapes, finishes and colour temperatures.
- ▶ Installation completed within minutes.
- ▶ Dimmable
- ▶ ASTM airtight rating
- ▶ IC rated
- ▶ Fire rated FT4 wires (UL 2464)



AIRTIGHT



TYPE IC



NO MERCURY



DAMP



5 YEARS WARRANTY



RoHS COMPLIANT



DIMMABLE



ENERGY STAR



ETL US




FCC

STANDARD®

Low Profile LED Downlights

The perfect solution when space is limited.

Thanks to a sleek design, the LPDL gives you all the flexibility you need for installation, especially in confined areas or when facing constraints such as wood beams, ceiling joists or air ducts. With a thin profile and multiple driver installation options, there is no need for compromise! Install the Low Profile Downlight exactly where you want it!

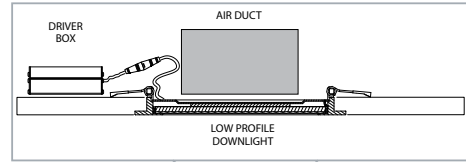

Order Code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	CRI	Colour finish	Average life (hrs)	Initial lumens	Traditional equivalent (W)	Dimmable (Y/N)	Case qty
------------	-------------	-----------	-------------	------------------	-----	---------------	--------------------	----------------	----------------------------	----------------	----------

Low Profile 4" Square Downlight

MOL: 13/16 in. (21 mm) DIA: 4 23/32 in. (120.5 mm)

63891	LPDL4/SQR/9W/30K/WH/STD	9	120	3 000	80	White	40 000	530	50	Y	24
63893	LPDL4/SQR/9W/30K/SLV/STD	9	120	3 000	80	Brushed Aluminum	40 000	530	50	Y	24

Low Profile 4" Round Downlight


MOL: 13/16 in. (21 mm) DIA: 4 23/32 in. (120.5 mm)

63879	LPDL4/RND/9W/27K/WH/STD	9	120	2 700	80	White	40 000	510	50	Y	24
63882	LPDL4/RND/9W/30K/WH/STD	9	120	3 000	80	White	40 000	530	50	Y	24
63884	LPDL4/RND/9W/30K/SLV/STD	9	120	3 000	80	Brushed Aluminum	40 000	530	50	Y	24
63883	LPDL4/RND/9W/30K/BLK/STD	9	120	3 000	80	Black	40 000	530	50	Y	24
63885	LPDL4/RND/9W/40K/WH/STD	9	120	4 000	80	White	40 000	550	50	Y	24
63887	LPDL4/RND/9W/40K/SLV/STD	9	120	4 000	80	Brushed Aluminum	40 000	550	50	Y	24
63886	LPDL4/RND/9W/40K/BLK/STD	9	120	4 000	80	Black	40 000	550	50	Y	24

Low Profile 6" Round Downlight

MOL: 13/16 in. (21 mm) DIA: 6 7/8 in. (174.5 mm)

63864	LPDL6/RND/12W/30K/WH/STD	12	120	3 000	80	White	40 000	780	60	Y	24
63867	LPDL6/RND/12W/40K/WH/STD	12	120	4 000	80	White	40 000	820	60	Y	24



Accessories

Order Code	Description	Type	Size (in.)	Hole	Length (ft.)
62676	RF/ACC/4/MOUNT. PLATE/SQR/STD	Mounting plate	4	Round	N/A
62677	RF/ACC/4/MOUNT. PLATE/ADJ/STD	Mounting plate	4	Round	N/A
62678	RF/ACC/4/MOUNT. PLATE/HANG.BARS/STD	Mounting plate with Hanger Bars	4	Round	N/A
64263	LPDL/ACC/6INRDN/MOUNTPLATE/STD	Mounting plate	6	Round	N/A
64264	LPDL/ACC/6FT/EXTCABLE/STD	Extension cord	N/A	N/A	6

Life rating based on L70 lumen depreciation design criteria. Average life of lamps that have been approved for ENERGY STAR.
Typical lumens +/- 5 %

STANDARD[®]