

TeraSPEED® Single Jacket All-Dielectric, Gel-Free, Outdoor Stranded Loose Tube Cable

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber OSP cable


General Specifications

Cable Type	Stranded loose tube
Construction Type	Non-armored
Fiber Type, quantity	6
Fibers per Subunit, quantity	6
Filler, quantity	4
Jacket Color	Black
Subunit Type	Gel-free
Subunit, quantity	1
Total Fiber Count	6

Dimensions

Buffer Tube/Subunit Diameter	2.5 mm   0.098 in
Diameter Over Jacket	10.2 mm   0.402 in

Representative Image

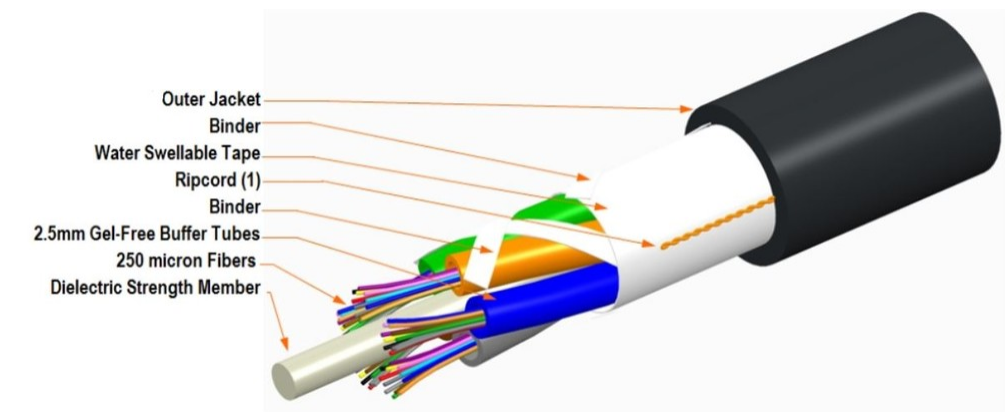

Material Specifications

Jacket Material

PE

Mechanical Specifications

Minimum Bend Radius, loaded	153 mm   6.024 in
Minimum Bend Radius, unloaded	102 mm   4.016 in
Tensile Load, long term, maximum	800 N   179.847 lbf
Tensile Load, short term, maximum	2700 N   606.984 lbf
Compression	22 N/mm   125.623 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	35 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	4.41 N-m   39.032 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	1307 m   4,288.058 ft

Optical Specifications

Fiber Type

G.652.D and G.657.A1 , TeraSPEED® | G.652.D and G.657.A1, TeraSPEED® | OS2 | OS2

## Environmental Specifications

<b>Installation temperature</b>	-30 °C to +70 °C (-22 °F to +158 °F)
<b>Operating Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +75 °C (-40 °F to +167 °F)
<b>Cable Qualification Standards</b>	ANSI/ICEA S-87-640   EN 187105   Telcordia GR-20
<b>Environmental Space</b>	Aerial, lashed   Buried
<b>Jacket UV Resistance</b>	UV stabilized
<b>Water Penetration</b>	24 h
<b>Water Penetration Test Method</b>	FOTP-82   IEC 60794-1 F5

## Environmental Test Specifications

<b>Cable Freeze</b>	-2 °C   28.4 °F
<b>Cable Freeze Test Method</b>	FOTP-98   IEC 60794-1 F15
<b>Heat Age</b>	-40 °C to +85 °C (-40 °F to +185 °F)
<b>Heat Age Test Method</b>	IEC 60794-1 F9
<b>Low High Bend</b>	-30 °C to +60 °C (-22 °F to +140 °F)
<b>Low High Bend Test Method</b>	FOTP-37   IEC 60794-1 E11
<b>Temperature Cycle</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

<b>Cable weight</b>	63 kg/km   42.334 lb/kft
---------------------	--------------------------

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



## Included Products

CS-8W-LT – TeraSPEED® OS2 Singlemode Fiber

## \* Footnotes

# 760053835 | D-006-LN-8W-F06NS

---

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable