

Cube RL-CUBE-60-BK

Recessed Light

Product Finishes: ■




Specifications:

Voltage: 12V AC
Wattage: 1
Volt Amps: 1.5
Lumens: 11
Color Temp: 2700k
IP Rating: 67
CRI: 93
Light Source: Integrated


Material: Polycarbonate
Cable Length: 36"
Lux (lx): 1.4
Candelas (cd): 5.4
Rated Life: 50,000 hours
Warranty: 7-year comprehensive
Dimmable: No
Color-Changing: No
Drive-Over Rated: Yes

Product Uses:
Decks, Pathways, Pavers,
Stairs, Risers, Concrete

Accessories:
Fang

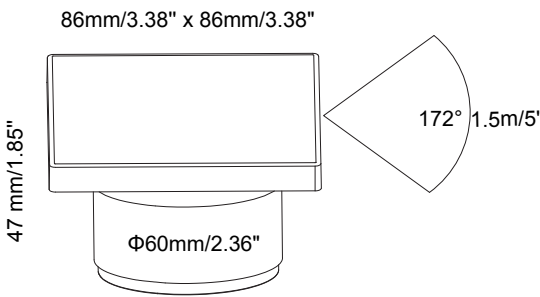

Max. Luminous intensity : 5.4 cd

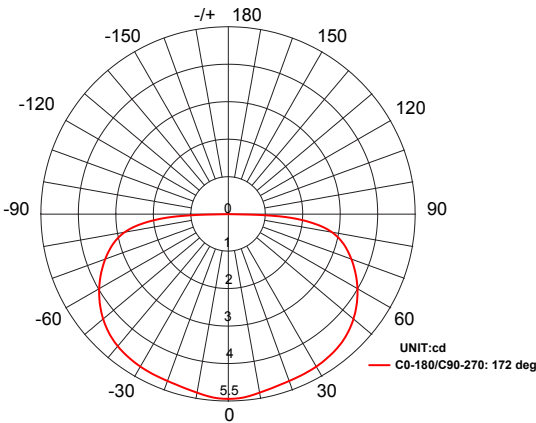

AVERAGE BEAM ANGLE 90/270 (50%): 172 DEG
AVERAGE BEAM ANGLE 0/180 (50%): 172 DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	2.10/61.18		0.32
1.5	0.39/7.34		0.60
3	0.10/1.84		1.17
5	0.05/1.02		1.83
6.5	0.03/0.50		2.54

AVERAGE BEAM ANGLE 90/270 (50%): 178 DEG
AVERAGE BEAM ANGLE 0/180 (50%): 177 DEG