

Product data sheet

Characteristics

XZCC8MDM30V

male, M8, 3-pin, straight connector - cable gland
M9.5 x 1



Main

Accessory / separate part category	Cabling accessories
Accessory / separate part type	Connector
Electrical connection	Straight male connector M8, 3 pins
Collar material	Metal
Status LED	Without
Cable connection	Vampire clip 0.00 in ² (0.25 mm ²) 0.20 in (5 mm)

Complementary

Cable gland type	M9.5
Cable connector fixing	Screw-on
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	4 A
Enclosure material	Plastic
Minimum insulating resistance	1 GΩ
Contact resistance	5000 μOhm
Net weight	0.02 lb(US) (0.01 kg)

Environment

IP degree of protection	IP67
Ambient air temperature for operation	-40...185 °F (-40...85 °C)

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	0.42 oz (12 g)
Package 1 Height	0.79 in (2 cm)
Package 1 width	3.31 in (8.4 cm)
Package 1 Length	4.92 in (12.5 cm)
Unit Type of Package 2	BAG

Number of Units in Package 2	1
Package 2 Weight	0.42 oz (12 g)
Package 2 Height	0.79 in (2 cm)
Package 2 width	3.31 in (8.4 cm)
Package 2 Length	4.92 in (12.5 cm)
Unit Type of Package 3	S01
Number of Units in Package 3	20
Package 3 Weight	15.52 oz (440 g)
Package 3 Height	5.91 in (15 cm)
Package 3 width	5.91 in (15 cm)
Package 3 Length	15.75 in (40 cm)


Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Not applicable, out of EU RoHS legal scope

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

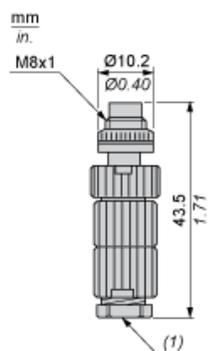

(1) Cable gland : M9.5 x 1

Connections and Schemes

