

**CL110 LED**

LOW PROFILE FLUSH MOUNT



NAME:

TYPE:

DATE:

NOTES:

**SPECIFICATIONS**

WIRING:	Installs easily in traditional junction boxes ( 3" or 4" ).
HOUSING DETAILS:	<p>The AURA low-profile series housings have a corrosion-resistant die-cast aluminum construction.</p> <p>It features a matte white acrylic diffuser with a unique press-release mechanism for easy removal and maintenance.</p> <p>The unit is completely protected from moisture infiltration, giving it its WET location rating.</p>
OPTICS:	LED technology delivers 1000 lumens ( 7" version ) and 2000 lumens (11" version ).
ELECTRICAL:	<p>Energy efficient LED utilizing a 120V 60Hz driver.</p> <p>Certifications: ETL and Energy Star listed to U.S. and Canadian safety standards for DAMP &amp; WET locations.</p> <p>Phase Control: Forward Phase</p>
LENS:	LED technology in combination with a white acrylic frosted lens, provides an even light distribution.

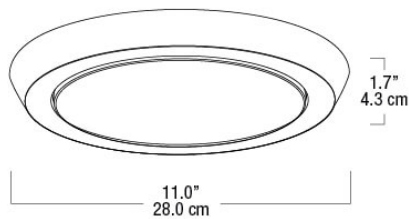
COLOR TEMPERATURE:	3K - 4K
OPERATING TEMPERATURE:	-40°C + 40°C
CRI:	80+
LUMEN OUTPUT:	2000 lumens
DIMMABLE:	Yes
WATTS:	26W
LED LIFE:	50,000 hours
WARRANTY:	5 years
VOLTAGE:	120V
DIAMETER:	11.00" (279.4 mm)
HEIGHT:	1.70" (43.2 mm)
INTEGRATED MOTION SENSOR:	No

**APPLICATIONS**

The Aura low-profile series LED flush mounts provide general illumination suitable for indoor or outdoor residential and commercial applications. Ideal for use in closets, foyers, hallways, bedrooms, offices, utility work areas, stairways, and many other rooms in the house or work place environment.

# CL110 LED

LOW PROFILE FLUSH MOUNT

**DIMENSIONS**

**RATINGS**

**ORDERING GUIDE**
**AURA CL110 SERIES**

Series	Color Temperature	Finish
CL110-26W	3K 3000K/80CRI/26W 4K 4000K/80CRI/26W	WH White
<b>Notes:</b> Configure product using <b>BOLD</b> options: Ex: <b>CL110-26W-3K-WH</b>		