UQXMPLUGD



Ultra Low Loss (ULL) LazrSPEED® 550 OM4 MPO/12 (Unpinned) to LC Uniboot, 12-Fiber, Plenum

Product Classification

Regional Availability Europe | Latin America | Middle East/Africa | North America

Portfolio CommScope®

Product Type Fiber array cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

General Specifications

Color, boot ABlackColor, boot BBeigeColor, connector AAqua

Construction Type Stranded

Fibers per Subunit, quantity 12

Furcation Color Agua

Interface, Connector A MPO-12/UPC

 Interface, Connector B
 LC/UPC

 Interface Feature, connector B
 Uniboot

 Jacket Color
 Aqua

Polarity Method B Enhanced (ULL)

Total Fibers, quantity 12

Dimensions

Color, connector B

Breakout Length 12 in | 24 in | 36 in | 48 in | 60 in | 72 in

Beige

Cable Assembly Length Range (m) 1 – 304


COMMSC PE°

UQXMPLUGD

Cable Assembly Length Range (ft)

2 - 999

Ordering Tree

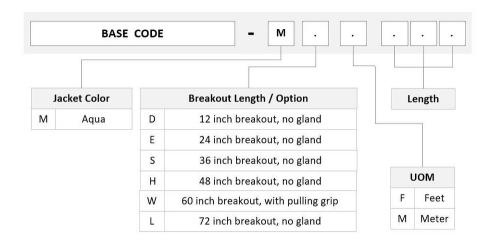

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system



Included Products

760074997 – LazrSPEED® Plenum MPO Light Duty Patchcord Cable, 12

Page 2 of 3



UQXMPLUGD

P-012-MP-5K-F30AQ fiber

760242035 – LazrSPEED® Plenum MPO Light Duty Patchcord Cable, 12

P-012-MP-5K-F20AQ fib

860366210 - MP012, ULTRA LOW LOSS, FEMALE, OM3/4, AQUA, 3mm

