



4" TC REMODEL HOUSING

INCANDESCENT LAMPS

V4TCR W

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

TC Remodel Housing designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing • In Canada, when insulation is present, type IC fixture must be used • TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see reverse.

Socket Floating medium base porcelain socket with nickel-plated copper screw shell • Shipped with socket cap to protect against paint overspray.

Trims Trim selection shown on reverse.

Labels UL/cUL listed for through-branch wiring, damp locations and IP
 • Product thermally protected against improper use of lamps or insulation
 • UL/cUL Listed • Trim V4012 is wet location approved for covered ceiling applications • Trims V4017 and V4034 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

INSTALLATION



Junction Box Pre-wired junction box provided with removable access plate, (5) 1/2" knockouts and (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing TC housing, 22-gauge aluminum • Remodel springs accommodate up to a 5/8" ceiling thickness.

PRODUCT CODES

Catalog No.	Input Voltage	Lamp Rating (max.)
V4TCR W	120V	PAR20/R20/PAR16/R16 (See reverse for max. trim rating)

DIMENSIONS

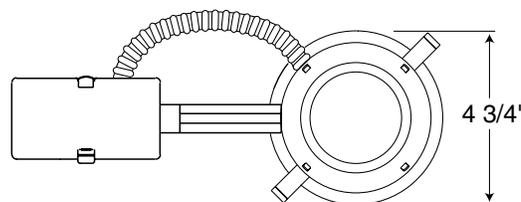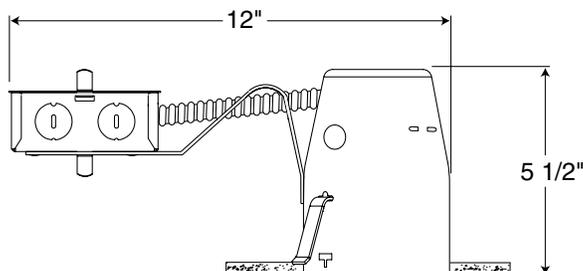

4 3/8" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
SMPLT4	4" Housing Locator

To order, specify catalog number

4" TC REMODEL HOUSING

INCANDESCENT LAMPS

V4TCR W

TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
	V4034 WWH◆◆ V4034 BWH◆◆	White Baffle Black Baffle	50W PAR20, 50W R20
	V4017 CWH◆◆	Clear Cone	50W PAR20, 50W R20
	V4010 WH	White Gimbal Ring	50W PAR20
	V4018 WH	White Eyeball	60W PAR16, 40W R16
	V4012 WH◆	Stippled Opal Lens Shower with Reflector	50W PAR20, 50W R20

Trim Size: 5" O.D.

Trim Finish: WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL/cUL Listed for use in wet location.

◆◆ UL/cUL Listed for use in wet location with outdoor rated lamp.