

Technical Information Bulletin - LED Downlight

E-Lume™

Date: _____
In hands date of project: _____
Project name/Number: _____
Name of distributor: _____
Client #: _____
Name of end user: _____

ORDERING INFORMATION

Order code: 66207
Description: LPDL4/RND/11W/30K/BN/ELUME
UPC: 69549662070
Case quantity: 32



PERFORMANCE DATA

Shape: Round
Type: E-Lume LED LPDL 4"
Lens type: Frosted plastic
Trim finish: Brushed nickel
Wattage (W): 11
Voltage (VAC): 120
Beam angle: 100°
Color temperature (K)**: 3 000
Lumens (lm)*: 700
Lumens per watt (lm/W): 64
Life (hours): 36 000
CRI: >80
Dimming type: Forward-Reverse phase
THD (%): 18
Power factor: >0.9
Operating temperature range: - 20 °C / - 4 °F to 40 °C / 104 °F

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %



AIRTIGHT



DAMP



DIMMABLE



RATED



QUICK
CONNECT



COMPLIANT



5
YEARS
WARRANTY



ICES
005



FCC




ETL
intertek



ENERGY
STAR

TECHNICAL DRAWINGS

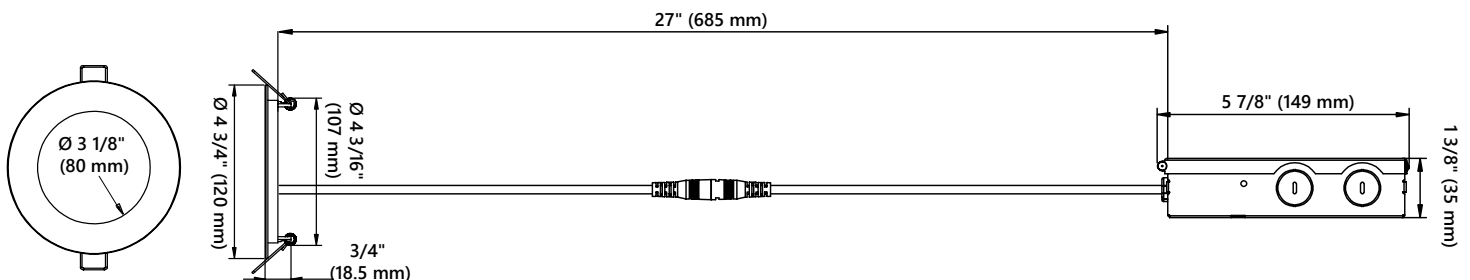

CAN ICES-005 (B) - This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. For a complete list of ENERGY STAR qualified products, please visit www.standardpro.com. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

January 3, 2018

STANDARD®


Technical Information Bulletin - LED Downlight

E-Lume™

ORDERING INFORMATION

Order code: 66207
Description: LPDL4/RND/11W/30K/BN/ELUME
UPC: 69549662070
Case quantity: 32

PHOTOMETRICS - BEAM SPREAD*

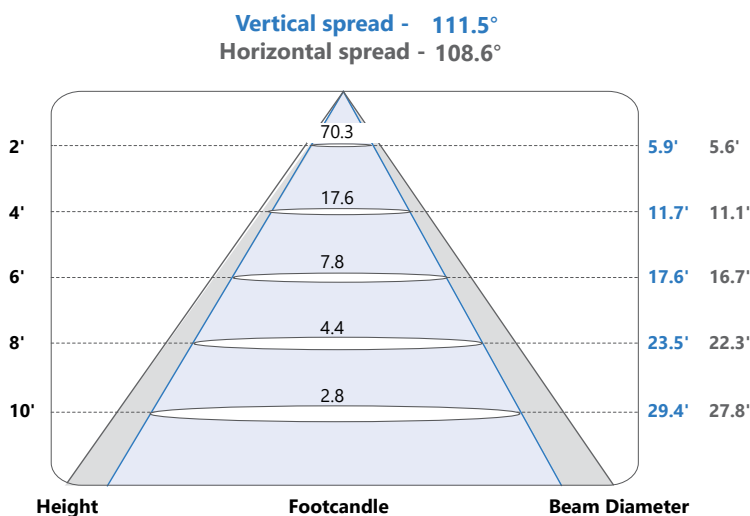

* complete IES files available on our website.

COMPATIBLE DIMMER LIST

Brand: Model
Legrand HCL453P
Cooper DAL06P, SLC03P
Leviton 6615, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ
Lutron AYCL-253P, CTCL-153P, DVCL-153P, DVCL-253P, DVELV-300P, MACL-153P, PD-6WCL, SELV-300P

*NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Standard recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Do not mix products of different wattages or types on the same dimming circuit. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
Company: _____
Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

January 3, 2018

STANDARD®