

Silo Mini RL-SILO-22-BK

Recessed Light

Product Finishes: ■





Specifications:

Voltage: 12V AC
Wattage: 0.2
Volt Amps: 0.3
Lumens: 3
Color Temp: 2700k
IP Rating: 67
CRI: 93
Light Source: Integrated

Material: Polycarbonate
Cable Length: 36"
Lux (lx): 0.4
Candelas (cd): 1.48
Rated Life: 50,000 hours
Warranty: 7-year comprehensive
Dimmable: No
Color-Changing: No
Drive-Over Rated: Yes

Product Uses:
Decks, Pathways, Pavers,
Stairs, Risers, Concrete,
Docks

Accessories:
Fang Mini

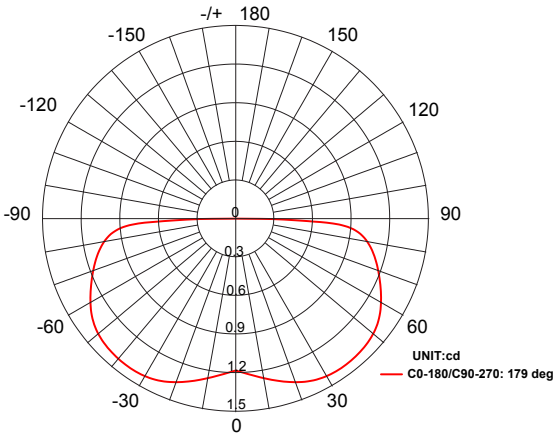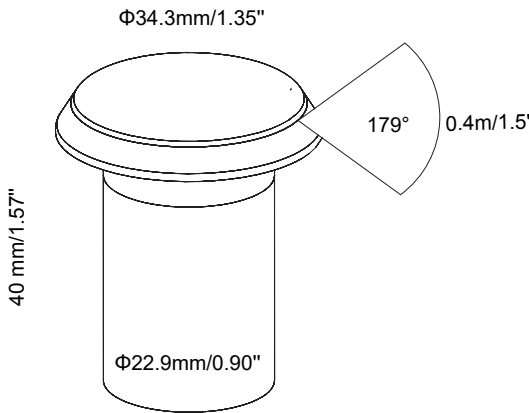

Max. Luminous intensity : 1.48 cd

AVERAGE BEAM ANGLE 90/270 (50%): 179 DEG
AVERAGE BEAM ANGLE 0/180 (50%): 179 DEG

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	0.193/14.16		0.84
1.5	0.23/1.69		1.58
3	0.012/0.86		2.21
5	0.006/0.47		3.50
6.5	0.002/0.11		6.83

AVERAGE BEAM ANGLE 90/270 (50%): 179 DEG
AVERAGE BEAM ANGLE 0/180 (50%): 179 DEG

