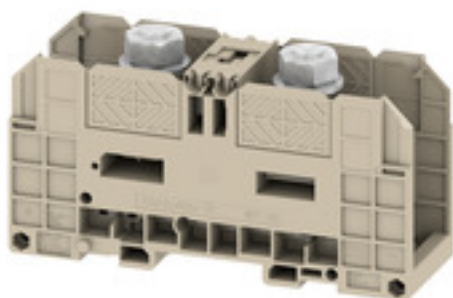


WFF 120**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

The comprehensive range of stud terminals ensures secure connections for all power transmission applications. Connections range from 10 mm² to 300 mm². The connectors are attached to the threaded pins using crimped cable lugs and each connection is secured by tightening the hexagon nut. Stud terminals with threaded pins from M5 to M16 can be used according to the wire cross-section.

General ordering data

Version	Bolt-type screw terminals, Feed-through terminal, Rated cross-section: 120 mm ² , Threaded stud connection, Direct mounting
Order No.	1028500000
Type	WFF 120
GTIN (EAN)	4008190004866
Qty.	5 pc(s).

WFF 120

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	72 mm	Depth (inches)	2.835 inch
Depth including DIN rail	80.5 mm	Height	132 mm
Height (inches)	5.197 inch	Width	42 mm
Width (inches)	1.654 inch	Net weight	246.662 g

Temperatures

Storage temperature		Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity
	-25 °C...55 °C		
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

Rating data IECEx/ATEX

Certificate No. (IECEX)	IECEXULD15.0004U	Max. voltage (IECEX)	1100 V
Current (IECEX)	269 A	Wire cross section max. (IECEX)	120 mm ²
Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity	Marking EN 60079-7	
			Ex eb II C Gb
Ex 2014/34/EU label	II 2 G D		

System specifications

End cover plate required	No	Number of levels	1
Number of clamping points per level	2	Levels cross-connected internally	No
PE connection	No	Rail	TS 35

Additional technical data

Explosion-tested version	Yes	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	closed
Type of mounting	Snap-on		

CSA rating data

Certificate No. (CSA)	200039-1244019	Current size C (CSA)	310 A
Voltage size C (CSA)	600 V	Wire cross section max. (CSA)	250 kcmil
Wire cross section min. (CSA)	10 AWG		

WFF 120

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

2 x cable lugs DIN 46 234	6 to 120 mm ²
Cable lug to DIN 46234	6...150 mm ²
Clamping range, max.	150 mm ²
Connection cross-section, stranded, max.	150 mm ²
Number of connections	2
Tightening torque, max.	20 Nm
Type of connection	Threaded stud connection
Wire connection cross section, finely stranded, min.	6 mm ²
Wire connection cross-section, solid core, min.	6 mm ²

2 x cable lugs DIN 46 235	16...120 mm ²
Cable lug to DIN 46235	16...150 mm ²
Clamping range, min.	6 mm ²
Connection cross-section, stranded, min.	6 mm ²
Stud size for spade connection	M 10
Tightening torque, min.	10 Nm
Wire connection cross section, finely stranded, max.	150 mm ²
Wire connection cross-section, solid core, max.	150 mm ²

General

Installation advice	Direct mounting	Rail	TS 35
---------------------	-----------------	------	-------

Rating data

Rated cross-section	120 mm ²	Rated voltage	1,000 V
Rated DC voltage	1,500 V	Rated current	269 A
Current at maximum wires	309 A	Volume resistance according to IEC 60947-7-x	0.12 mΩ
Rated impulse withstand voltage	8 kV	Power loss in accordance with IEC 60947-7-x	8.61 W
Pollution severity	3		

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	250 kcmil
Conductor size Factory wiring min. (UR)	10 AWG	Conductor size Field wiring max. (UR)	250 kcmil
Conductor size Field wiring min. (UR)	10 AWG	Current size C (UR)	310 A
Voltage size C (UR)	1000 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ETIM 9.0	EC000897
ECLASS 9.0	27-14-11-20	ECLASS 9.1	27-14-11-20
ECLASS 10.0	27-14-11-20	ECLASS 11.0	27-14-11-20
ECLASS 12.0	27-14-11-20	ECLASS 13.0	27-25-01-01
ECLASS 14.0	27-25-01-01		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

WFF 120

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (UR)	E60693
Certificate No. (cURusEX)	E184763

Downloads

Approval/Certificate/Document of Conformity	Attestation of Conformity
	UKCA Ex Attestation of Conformity
	CB Certificate
	POLSKIREJ certificate
	CCC Ex Certificate
	ATEX Certificate
	IECEX Certificate
	UKCA Ex Certificate
	DNV Certificate
	CE Declaration of Conformity
Engineering Data	UKCA declaration of conformity
	Confirmation of Standards EN 45545-2_2020-10
	CAD data – STEP
	PCN WFF
	StorageConditionsTerminalBlocks
Product Change Notification	WFF range for 1500 VDC applications
	DIRECT MOUNTING WFF TERMINAL BLOCKS
	NTI WFF 120
	Catalogues in PDF-format
Catalogues	
Brochures	

WFF 120

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

