

Technical Information Bulletin Fluorescent

E-Lume™

ORDERING INFORMATION

Order code: 56510
 Description: F6T5/CW/PH/G5/ELUME
 UPC: 69549565104
 Case quantity: 48




Nominal length : 9 in. (229 mm) Dia. : 1/8 in. (16 mm)

PERFORMANCE DATA


Shape: T5
 Base: G5 (Min Bipin)
 Starting method: Preheat Start (PH)
 Wattage (W): 6
 Colour temperature (K): 4 100
 CRI: 62
 Rated life on IS¹ ballast:
 Based on a 3 hour start 6 000
 Based on a 12 hour start 7 500
 Initial lumens (lm): 240
 Mean lumens (lm): 226
 Nominal efficiency (lm/W): 40
 TCLP compliant: N/A
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): 10

DIMENSIONS

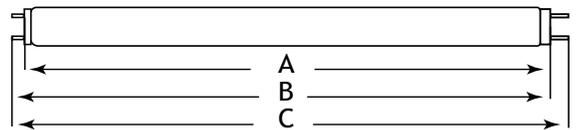

| A Max | B Min / B Max | C Max |
|------------------------|---------------------------------------|--|
| Base face to base face | Base face to end of opposite face pin | End of base pin to the end of opposite end |
| 8.35 in. | 8.53 in./8.62 in | 8.90 in. |
| 212.1 mm | 216.8 mm/219.2 mm | 226.3 mm |

SPECTRAL DISTRIBUTION

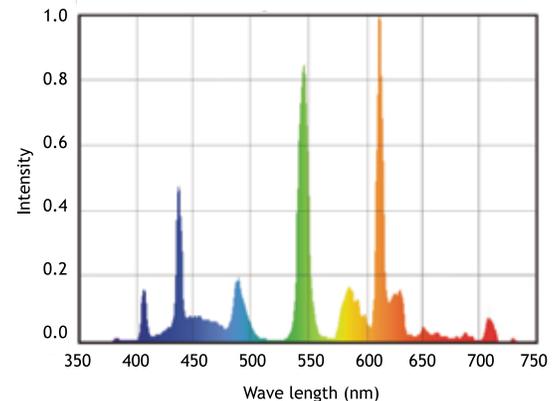

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T5 E-Lume ballast.

