

MECHANICAL CONNECTORS

Aluminum Dual Rated Stacked Lugs

T2 SERIES



FEATURES

- Large size set-screw connectors with wire holes stacked on top of each other to minimize the width of the connector.
- Made of 6061T-6 aluminum alloy.
- Electro-tin plated for low contact resistance.
- For use with copper or aluminum conductors.

All dimensional data is listed in inches.

CAT. NO.	FIG. NO.	WIRE RANGE
300T-2	1	(2) 300 MCM-6 AWG
350T-2	2	(2) 350 MCM-6 AWG
600T-2	2	(2) 600 MCM-2 AWG
600T-3	3	(3) 600 MCM-2 AWG
600T-4	4	(4) 600 MCM-2 AWG
800T-2	2	(2) 800-300 MCM
800T-3	3	(3) 800-300 MCM
800T-4	4	(4) 800-300 MCM

RATINGS



LISTED
WIRE CONNECTOR
E155027


TEMPERATURE RATING:

90 °C.

VOLTAGE:

600V (2000V max. per UL486B).

UL 486A/B Listed.

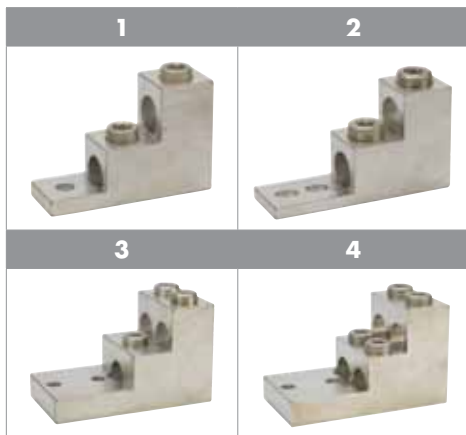



MTG. BOLT SIZE	TORQUE VALUE (IN./LBS.)	WRENCH SIZE	MTG. HOLE DIA. (E)	LENGTH (L)	WIDTH (W)	HEIGHT (H)	END OF CONN. TO CTR. HOLE (A)	TANG LENGTH (B)	TANG THICKNESS (D)	STD. CTN. QTY.
5/16"	330	5/16	0.330	3.000	1.000	2.000	0.470	1.000	0.310	10
5/16"	400	5/16	.33 X .43	3.560	1.060	2.000	0.470	1.560	0.250	10
3/8	550	3/8	0.410	4.910	1.500	3.000	0.380	2.340	0.750	2
3/8	550	3/8	0.410	4.910	2.500	3.000	0.380	2.340	0.750	2
3/8	550	3/8	0.410	4.910	2.500	3.000	0.380	2.340	0.750	2
3/8	550	3/8	0.410	4.910	1.500	3.000	0.380	2.340	0.750	2
3/8	550	1/2	0.410	4.910	2.630	3.000	0.380	2.340	0.750	2
3/8	550	1/2	0.410	4.910	2.630	3.000	0.380	2.340	0.750	2

