

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# LED PUCK LIGHT

Line Voltage (120 V)

### ORDERING INFORMATION

**Order code:** 67101  
**Model number:** UCP/1WIRE/120V/4W/30K/FR/WH/STD  
**UPC:** 069549671010  
**Case quantity:** 50

### PHYSICAL DATA

**Grandeur:** 2 3/4" (69 mm)  
**Forme:** Round  
**Couleur du boîtier:** White  
**Fini de la lentille:** Frosted  
**Installation:** Surface and Recessed  
**Installation en série:** Up to 20 units can be installed in row


### PERFORMANCE DATA

**Watts (W):** 4  
**Volts (VDC):** 120  
**Colour temp. (K):** 3 000  
**Lumen output (lm):** 248  
**Lumen per Watts (lm/W):** 62  
**CRI:** 90  
**Life L70 (h):** 36 000  
**Beam angle (°):** 120  
**THD (%):** <15  
**Power factor:** >0.9  
**Dimming:** Forward and Reverse  
**Operating temp. range:** -30°C to 40°C (-22°F to 104°F)

<sup>1</sup> Typical color temperature range: +/- 5 %.  
<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.  
<sup>3</sup> Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

### ACCESSORIES (order separately)

Order code	Description	Type	Figure	Length in (mm)	Case qty (master)
67106	UCP/PLUG/120V/STD	120 V Power Cord Plug	A	73 5 / 8 (1 870)	100
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box	B	6 1/2 (165)	50
67108	UCP/JUMPER/12IN/STD	12" Jumper	C	12 (304)	500
67109	UCP/JUMPER/36IN/STD	36" Jumper	C	36 (914)	500
67110	UCP/JUMPER/72IN/STD	72" Jumper	C	72 (1 828)	250

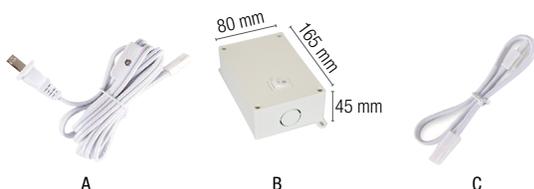

quick ship



LED fixture



dimmable



dry location



ICES 005



This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


**COMPATIBLE DIMMERS**

Brand	Model number
LEGRAND	PD-5NE
LUTRON	PD-6WCL, CTCL-153P, DVCL-253P, AYCL-253P, SELV-300P, MACL-153P
COOPER	RRD-6NA-WH, AAL06, SCL03P
LEVITON	6615, IPL06, 6674, DSM10-1LZ, IPE04-1LZ

<sup>1</sup> Flickering might occur between 0-25% on low intensity settings.

<sup>2</sup> The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.


**DIMENSIONS**

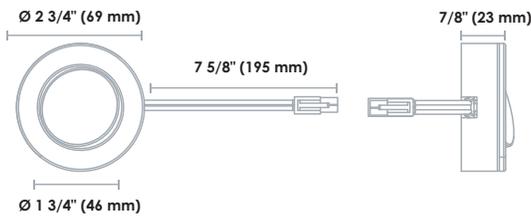

**PHOTOMETRIC DATA<sup>1</sup>**

**67101 • UCP/1WIRE/120V/4W/30K/FR/WH/STD • 248.0 lm**

**Polar candela distribution**

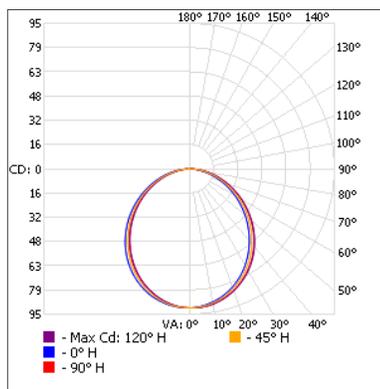

**Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	69.5	28%
0-40	112.7	45.4%
0-60	195.1	78.7%
60-90	51.2	20.7%
70-100	22.4	9%
90-120	0.6	0.3%
0-90	246.4	99.3%
90-180	1.7	0.7%
0-180	248.0	100%

**Illuminance at a distance**

Center beam fc		Beam width	
1.7'	31.4	4.6'	4.6'
3.3'	8.32	8.8'	9.0'
5.0'	3.63	13.4'	13.6'
6.7'	2.02	18.0'	18.2'
8.3'	1.32	22.3'	22.5'
10.0'	0.91	26.8'	27.2'

Vert. spread: 106.6°  
 Horiz. spread: 107.3°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.