

**HB165-4K-GR**

Universal High Bay



NAME:	
TYPE:	
DATE:	
NOTES:	

**SPECIFICATIONS**

<b>HOUSING DETAILS:</b>	<p>Extruded aluminum body and end cap offering superior thermal performance at warm ambient temperatures.</p> <p>Also included, a 10-step field adjustable knob, to allow for varied wattage and lumen outputs.</p>
<b>INSTALLATION:</b>	<p>Hardwire only. It is suitable for suspension by chain or cable. Surface mounting not recommended.</p> <p>To maintain maximum thermal performance and ambient listing, fixture should be mounted at a minimum plenum height of 18".</p>
<b>ELECTRICAL:</b>	<p>Easily connected to a 120-347V power supply via provided UL listed driver.</p> <p>Damp location rated - IP30 rated</p> <p>Certifications: This product is UL and DLC Premium listed in USA &amp; Canada.</p>

COLOR TEMPERATURE:	4k
OPERATING TEMPERATURE:	-40°C + 40°C
CRI:	80+
LUMEN OUTPUT:	1,250 - 25,000 LM
DIMMABLE:	Yes
WATTS:	165 W
LED LIFE:	100,000 hours
WARRANTY:	5 years
HEIGHT:	2.30" (5.8cm)
LENGTH:	18.0" (45.7cm)
WIDTH:	6.80" (17.3cm)


**APPLICATIONS**

The Eagle series offers a stylish high bay lighting design, combined with high light output and low energy costs. Added to this high-performance unit, is the ability to configure the luminaire output to the application needed. In other words, by simply rotating the selector knob located on the outside of the unit, the user may select a range from 1,250 to 25,000 lumens. One universal high bay luminaire for multiple applications! Stylishly designed for commercial, retail, office space, warehousing, manufacturing, or any large indoor spaces that require high levels of lighting.

**HB165-4K-GR**

Universal High Bay

DIMENSIONS

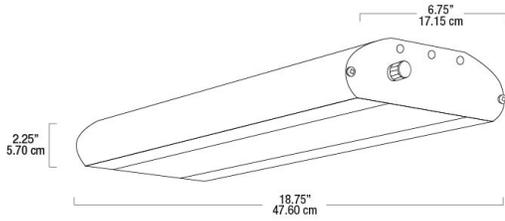

RATINGS

