


DEK 5 GW S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

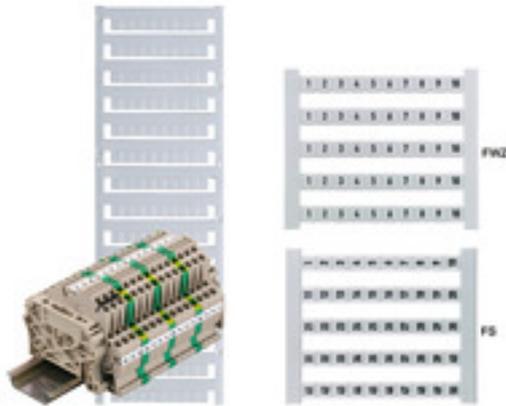

The dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a large range of ready-printed markers. Strips for fast installation in one work step. The printing is easy to read, rich in contrast, and is available in five widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank cards, MultiCard or as cards with standard printing

General ordering data

| | |
|------------|--|
| Version | Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmueller, white |
| Order No. | 0522761039 |
| Type | DEK 5 GW S |
| GTIN (EAN) | 4008190031947 |
| Qty. | 500 pièce(s) |

DEK 5 GW S

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Caractéristiques techniques

Dimensions and weights

| | | | |
|------------|--------|-----------------|------------|
| Height | 5 mm | Height (inches) | 0,197 inch |
| Width | 5 mm | Width (inches) | 0,197 inch |
| Net weight | 0,05 g | | |

Temperatures

| | |
|-----------------------------|--------------|
| Operating temperature range | -40...100 °C |
|-----------------------------|--------------|

General data

| | | | |
|--|--------------------------|------|--|
| Application/manufacture | Weidmueller | | |
| Colour | white | | |
| Colour of printing | black | | |
| Halogen | No | | |
| Material | Polyamide 66 | | |
| Material colour according to resistance code | 9 | | |
| Number of markers per combination | 1 Card = Terminal marker | | |
| Number of markers per packaging unit | Form of supply | Card | |
| Operating temperature range | -40...100 °C | | |
| Operating temperature range, max. | 100 °C | | |
| Operating temperature range, min. | -40 °C | | |
| Orientation of print | horizontal | | |
| Printed characters | Upper-case letters | | |
| Printing method | MC Laser | | |
| UL 94 flammability rating | V-2 | | |
| Width | 5 mm | | |

Connector markers

| | |
|-----------------|------|
| Pitch in mm (P) | 5 mm |
|-----------------|------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000761 | ETIM 7.0 | EC000761 |
| ETIM 8.0 | EC000761 | ETIM 9.0 | EC000761 |
| ECLASS 9.0 | 27-14-11-37 | ECLASS 9.1 | 27-14-11-37 |
| ECLASS 10.0 | 27-14-11-37 | ECLASS 11.0 | 27-28-11-01 |
| ECLASS 12.0 | 27-28-11-01 | ECLASS 13.0 | 27-28-11-01 |
| ECLASS 14.0 | 27-28-11-01 | | |

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Fiche de données**DEK 5 GW S**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Caractéristiques techniques**Downloads**

| | |
|-----------------------------|--|
| Engineering Data | CAD data – STEP |
| Product Change Notification | Technical change to MultiCard material - DE Technical change to MultiCard material - EN |
| Catalogues | Catalogues in PDF-format |
| Brochures | |