

OM4 MPO12 (Pinned) to MPO12 (Pinned), Fiber Patch Cord, 12-Fiber, Method A, Plenum

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Color, boot A	Black
Color, boot B	Black
Color, connector A	Aqua
Color, connector B	Aqua
Construction Type	Stranded
Fibers per Subunit, quantity	12
Furcation Color	Aqua
Interface, Connector A	MPO-12/UPC
Interface, Connector B	MPO-12/UPC
Jacket Color	Aqua
Polarity	Method A
Total Fibers, quantity	12

## Dimensions

Cable Assembly Length Range (m)	1 – 305
Cable Assembly Length Range (ft)	1 – 999

# AQXMXMXGD

## Ordering Tree

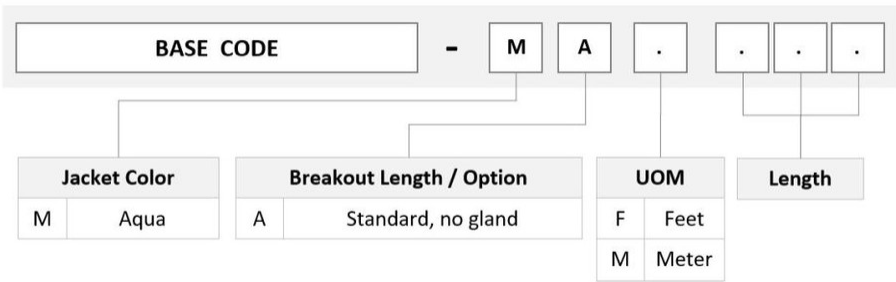

## Mechanical Specifications

**Cable Retention Strength, maximum** 11.24 lb @ 0 ° | 4.40 lb @ 90 °

## Optical Specifications

**Fiber Mode** Multimode  
**Fiber Type** OM4, LazrSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)  
**Environmental Space** Indoor | Plenum

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant/Exempted



## Included Products

- |                   |   |  |
|-------------------|---|--|
| 760074997         | – | LazrSPEED® Plenum MPO Light Duty Patchcord Cable, 12 |
| P-012-MP-5K-F30AQ |   | fiber  |
| 860366228         | – | MPO12, ULTRA LOW LOSS, MALE, OM3/4, AQUA, 3mm        |