

LEDBAR

LED Fluorobar
Cabinet, Cove & Display

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

Features

Housing

Durable extruded aluminum frame with frosted smooth lens. Suitable for dry location applications only. On-body on/off switch is provided for individual control (except 9" models).

LED Driver

Fixture is provided with built-in silent non-flicker electronic LED driver, 120V, 50/60Hz.

Light Output

This accent light is available in 3000°K, 4000°K or 5000°K colour temperatures, providing up to 2100 lumens, 111 lumens/watt.

Dimming

Fixture is dimmable with industry standard TRIAC, ELV and Incandescent dimmers.

LED Characteristics

Powered by LED integrated strip that maintains uniform intensity with 70% lumens at 25,000 hours average life; with a minimum CRI of 80.

Beam Spread

The fixture lens provides for 160° beam spread.

Linking

Complete with a joiner, these no shadow linking fixtures can be linked up to 10 units in a single run.

Mounting Kit

Hardware provided for mounting fixture to standard horizontal surfaces or vertical wall surface.

Operating Temperature


-10°C~40°C (14°F~104°F).

SPECIFICATION	
Approved Location	Dry
Beam Angle	160°
CCT	3000°K / 4000°K / 5000°K
Certification	cULus
Connection Type	3-Wire
CRI	80+
Dimming	Yes
Dimming Technology	TRIAC / ELV / Incandescent
Lumens	Up to 2100
Lumens per watt	Up to 111
Max. Operating Temp.	40°C
Min. Start Temp.	-10°C
Lumen Maintenance	70% @ 50,000 hrs
Rated Life	25,000 hrs
Voltage	120V
Warranty	3 Years
Wattage	Up to 22



Description

This LED Fluorobar light is a linear light with an integrated LED strip. Available with various lengths to meet any installation application.

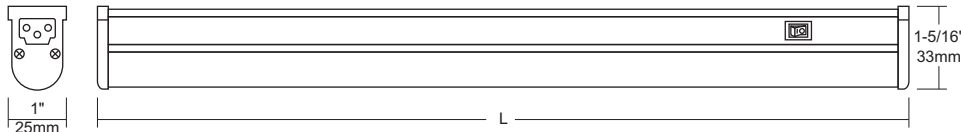

	LEDBAR9	LEDBAR14	LEDBAR23	LEDBAR34	LEDBAR46	LEDBAR58
Length (L)	9" 229mm	13-1/2" 344mm	22-5/8" 575mm	34-1/2" 875mm	46-1/4" 1175mm	58" 1475mm
Lumens	3000°K	260	420	760	1120	1530
	4000°K	260	440	880	1240	1650
	5000°K	280	460	1000	1360	1770



Notes: Accessories are sold separately. For additional options please consult your Liteline representative.
Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Ordering Guide

LEDBAR	Fixture Length	Colour Temperature
	9" : 3W	30K : 3000°K
	14" : 13-1/2", 5W	40K : 4000°K
	23" : 22-5/8", 9W	50K : 5000°K
	34" : 34-1/2", 14W	
	46" : 46-1/4", 18W	
	58" : 58", 22W	

Accessories (Power feed required)



ALFT6000-WH-3
6' Power cord for FluoroBar series.



ALFT6300-WH
Hardwire box for FluoroBar series, with on/off switch.

