
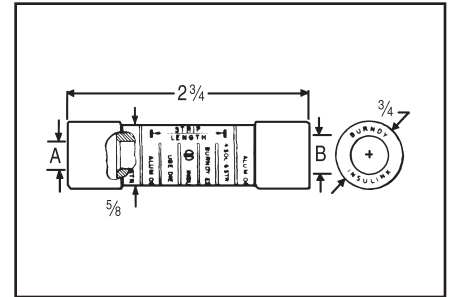


TYPES ES

INSULINK™

Service Entrance Sleeve for Insulated Combinations of Copper, Aluminum, ACSR Compressed.

For use in overhead distribution applications.

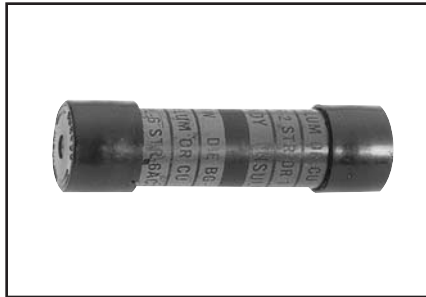

Pre-insulated service entrance compression connector installed with OH25, OUR840 and MD6 HYTOOL™ as well as Y35 and Y750 HYPRESS™ tools. Polyethylene caps prevent dirt from accumulating in barrel, grip cable for easy two-hand installation, and seal out moisture. Aluminum connector is

anchored to jacket, assuring the connector is under the die when crimping. Nylon jacket insulates connector electrically and protects against water and weather. Superior color coding. Pre-filled with PENETROX™ joint compound. Do not use insulated sealed connectors on bare conductors. Refer to LINKIT™ type connectors.

RUS Accepted

E-45

CATALOG NUMBER	SIDE A •			SIDE B •			DIE INDEX	TOOLS, DIE SET CATALOG NUMBER, & (CRIMPS PER END)
	ACSR	ALUMINUM & COPPER	COLOR CODE	ACSR	ALUMINUM & COPPER	COLOR CODE		
ES8W8W	—	10 Str. 8 Sol.	Brown	—	10 Str. 8 Sol.	Brown	BG or 5/8	HYTOOL™ TOOL DIE (CRIMPS PER END) OH25 (1) MD6, MD7 (3) MD6, MD7 W-BG (1)* OUR840 X-NBG (1)* HYPRESS™ TOOL DIE (CRIMPS PER END) Y35 U-BG (1)* Y750 *Multiple crimp die set, makes more than one crimp per tool compression. Figure indicates number of compressions.
ES6W8W	—	8 Str. 6 Sol. #8 AL Compt	Green	—	8 Str. 6 Sol. #8 AL Compt	Green		
ES6W6W	—			—	10 Str. 8 Sol.	Brown		
ES4W8W	6	5, 6 Str. 4 Sol.	Blue	—	8 Str. 6 Sol. #8 AL Compt	Green		
ES4W6W				—	5, 6 Str. 4 Sol.	Blue		
ES4W4W				6	10 Str. 8 Sol.	Brown		
ES2W8W	4	3, 4 Str. 2 Sol.	Orange	—	8 Str. 6 Sol. #8 AL Compt	Green		
ES2W6W				—	5, 6 Str. 4 Sol.	Blue		
ES2W4W				6	3, 4 Str. 2 Sol.	Orange		
ES2W2W				4	10 Str. 8 Sol.	Brown		
ES2R8W	2	1 Str. 2 Str. #1 AL Compt #2 AL Compt	Red	—	8 Str. 6 Sol. #8 AL Compt	Green		
ES2R6W				—	5, 6 Str. 4 Sol.	Blue		
ES2R4W				6	3, 4 Str. 2 Sol.	Orange		
ES2R2W				4	1 Str. 2 Str. #1 AL Compt #2 AL Compt	Red		
ES2R2R				2	8 Str. 6 Sol. #8 AL Compt	Green		
ES25R6W	1/0, 1	1/0 Str. 1-19 Str.	Yellow	—	5, 6 Str. 4 Sol.	Blue		
ES25R4W				6	3, 4 Str. 2 Sol.	Orange		
ES25R2W				4	2 Str. 1 Str. #1 AL Compt #2 AL Compt	Red		
ES25R2R				2	1/0 Str.	Yellow		
ES25R25R				1/0, 1	5, 6 Str., 4 Sol.	Blue		
ES25A25A	—	1/0 Str. ▲	Yellow	—	3, 4 Str., 2 Sol.	Orange		
ES25A4W	—			6				
ES25A2W	—			4				

* Not for use on bare conductors.

▲ Accommodates 1/0 stranded aluminum and copper, concentric, compressed and compact conductors.