UJXQXQXQF



Ultra Low Loss (ULL) OM4 MPO8 QSFP (Pinned) to MPO8 QSFP (Pinned), Fiber Trunk Cable Assembly, 24-Fiber, Low Smoke Zero Halogen (LSZH)

Product Classification

Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

Product Type Fiber trunk cable assembly

Product Brand SYSTIMAX ULL

Ordering Note Not available in the United States or Canada

General Specifications

Color, boot AGrayColor, boot BGrayColor, connector AAquaColor, connector BAquaConstruction TypeStranded

Fibers per Subunit, quantity 8

Furcation Color Aqua

Interface, Connector A MPO-08/UPC

Interface Feature, connector A QSFP configuration

Interface, Connector B MPO-08/UPC

Interface Feature, connector B QSFP configuration

Jacket Color Aqua

Polarity Method B Enhanced (ULL)

Total Fibers, quantity 24

Dimensions

COMMSCOPE®


UJXQXQXQF

Breakout Length 33 in

Cable Assembly Length Range (m) 3 - 999

Cable Assembly Length Range (ft) 10 – 999

Ordering Tree

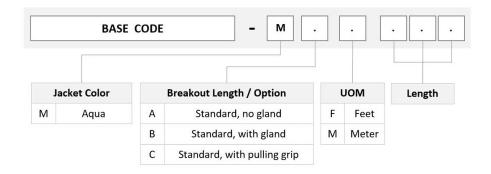

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 $^{\circ}$ | 4.40 lb @ 90 $^{\circ}$

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature $-10 \,^{\circ}\text{C}$ to $+60 \,^{\circ}\text{C}$ (+14 $^{\circ}\text{F}$ to +140 $^{\circ}\text{F}$)

Environmental Space Dual Rated LSZH/Riser

Regulatory Compliance/Certifications

Agenc	у	Classification
CHINA	-ROHS	Above maximum concentration value
ISO 90	01:2015	Designed, manufactured and/or distributed under this quality management system
REACH	H-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS		Compliant/Exempted





UJXQXQXQF

Included Products

760118380 N-036-MP-5K-F12AQ/D LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk Cable, 36 fiber multi-unit with 12 fiber subunits

860633308

- MPO8, ULTRA LOW LOSS, MALE, OM3/4, AQUA, 3m

