


URXQPLUJ8

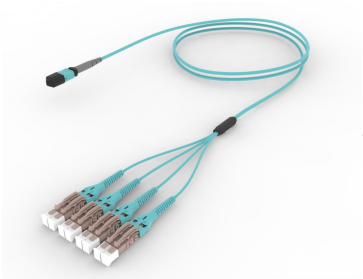

Ultra Low Loss OM4 MPO8 Unpinned to LC Uniboot 8-Fiber Low Smoke Zero Halogen/Riser Array Cord

Product Classification

Regional Availability	Asia Australia/New Zealand Europe Latin America Middle East /Africa North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications

Color, boot A	Gray
Color, boot B	Aqua
Color, connector A	Aqua
Color, connector B	Beige
Construction Type	Stranded
Fibers per Subunit, quantity	8
Furcation Color	Aqua
Interface, Connector A	MPO-08/UPC
Interface, Connector B	LC/UPC
Interface Feature, connector B	Uniboot
Jacket Color	Aqua
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	8

Dimensions


Breakout Length	12 in 24 in 36 in 48 in 60 in 72 in
Cable Assembly Length Range (m)	1 – 304

URXQPLUJ8

Cable Assembly Length Range (ft)

2 – 999

Ordering Tree

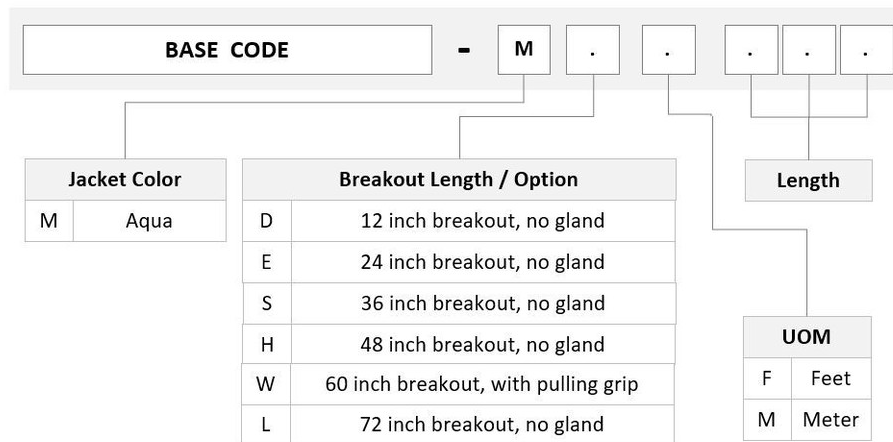

Mechanical Specifications

Cable Retention Strength, maximum

11.24 lb @ 0° | 4.40 lb @ 90°

Optical Specifications

Fiber Mode

Multimode

Fiber Type

OM4, LazrSPEED®

Environmental Specifications

Operating Temperature

-10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space

Indoor | Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

Agency

Classification

CHINA-ROHS

Above maximum concentration value

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system.

REACH-SVHC

Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS

Compliant/Exempted

URXQPLUJ8



Included Products

760102178	–	LazrSPEED® Low Smoke Zero Halogen Riser Light Duty MPO Patchcord Cable, 12
N-012-MP-5K-F30AQ/D		fiber
860633307	–	MPO8, ULTRA LOW LOSS, FEMALE, OM3/4, AQUA, 3mm
860650410	–	LazrSPEED® LC UniBoot 2.0MM MM/LC UNIBOOT CONNECTOR KIT