



GE
Lighting

46700 - F24W/T5/835/ECO

GE Ecolux® Starcoat® T5

- Passes TCLP, which can lower disposal costs.

a product of
ecomagination



High Color Rendering



GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight
Bulb	Linear
Base	T5
Rated Life (NOM)	30000.0 h
Rated Life (rapid start) @ Time	30000.0 @ 3.0/36000.0 @ 12.0 h
Bulb Material	Soda lime
Starting Temperature (MIN)	-20.0 °C
Mercury Content (NOM)	2.5 mg
Picograms of Mercury (NOM)	45.3 pg
Additional Info	TCLP compliant
Primary Application	Full Wattage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	2000.0
Mean Lumens (NOM)	1840.0
Nominal Initial Lumens per Watt (NOM)	83.33333
Color Temperature (NOM)	3500.0 K
Color Rendering Index (CRI) (NOM)	85.0
S/P Ratio (Scotopic/Photopic Ratio) (NOM)	1.5

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	24.0
Open Circuit Voltage (rapid start) Min @ Temperature	280 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.25
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Current Crest Factor (MAX)	1.7

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	21.600 in(548.6 mm)
Nominal Length (NOM)	21.600 in(548.6 mm)
Bulb Diameter (DIA) (MAX)	0.670 in(17.0 mm)
Bulb Diameter (DIA) (NOM)	0.625 in(15.9 mm)
Max Base Face to Base Face (A) (NOM)	21.610 in(548.9 mm)
Face to End of Opposing Pin (B) (MIN)	21.790 in(553.5 mm)
Face to End of Opposing Pin (B) (MAX)	21.890 in(556.0 mm)

PRODUCT INFORMATION

Product Code	46700
Description	F24W/T5/835/ECO
Standard Package	Case
Standard Package GTIN	10043168467008
Standard Package Quantity	40
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard	40
Package	
UPC	043168467001

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Wear safety glasses and gloves when handling lamp.
 - Do not use excessive force when installing lamp.

Warning


- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lumen Maintenance

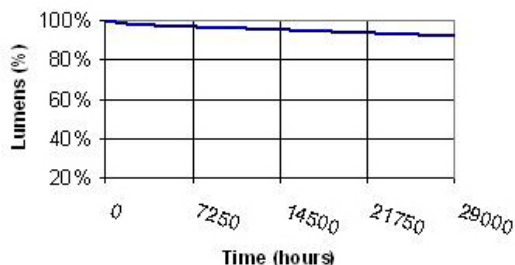

Graphs_Lamp Mortality

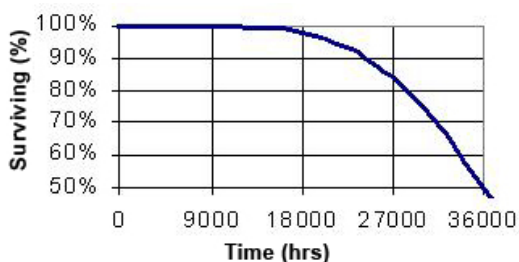

Graphs_Spectral Power Distribution

