


Wraparound LED Strip

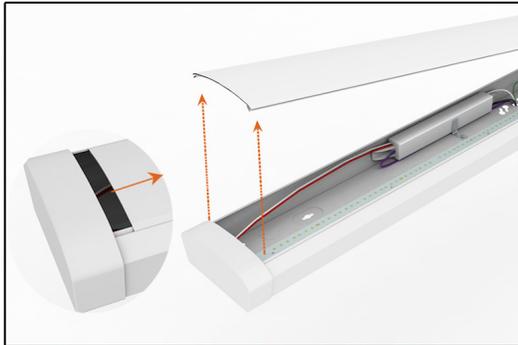

Specifications TLWAU4F42ND

Electrical Specifications

Model No.	TLWAU4F42ND
DLC ID	P68MGCZF
Power (W) ± 10%	42 W (41.4 W)
Input Voltage (V)	AC120-347V, 50/60Hz
Efficacy ± 3%	134.8 lm/W
Power Factor (PF)	0.945

Photometric Specifications

CRI	83
CCT	4 000 K
Beam angle	120°
Light Output ± 3%	5 585 lm
Dimmable	0-10V

Mechanical Specifications

IP Rating	IP20
Material	Steel and Polycarbonate
Lens	Frosted
Net Weight	1.8 kg
Product size (mm)	1 193.8 x 127 x 50.8 mm
Product size (inch)	± 47.6 x 5.3 x 2.1 in
Operating Humidity	10% - 90%
Operating Temperature	-20°C ~ 40°C
Lifespan (L70)	60 000 hours

Product Description:

- Soft and uniform lighting.
- Easy Installation with fast connection design, shorten the installation process and save labor cost.
- Save up in electricity consumption compared to fluorescent lighting fixture.
- Warranty: 5 Years.
- It could be fitted with sensor.
- Other CCT available on special request.
- Ceiling installation or optional suspension kit, not included.

Applications:

Suitable for houses, offices, commerces, basements, warehouses, garages, shops, etc.