Product data sheet
Characteristics

XZCPV11V12L2
pre-wired connectors XZ - straight female - M12 - 5 pins - cable PVC 2m

Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

Complementary

Electrical connection	Straight female connector M12, 5 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	6.56 ft (2 m)
Cable outer diameter	0.20 in (5.2 mm)
Cable composition	5 x 0.34 mm²
Wire insulation material	PVC
[Ue] rated operational voltage	60 V AC 75 V DC
[In] rated current	3 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.20 lb(US) (0.09 kg)

Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-25…80 °C static
Ambient air temperature for storage	-13…176 °F (-25…80 °C)

Packing Units

Package 1 Weight	0.28 lb(US) (0.126 kg)
Package 1 Height	0.200 dm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 1 width	1.700 dm
Package 1 Length	1.700 dm

Offer Sustainability

REACh Regulation	REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months

Life Is On Schneider Electric

XZCPV11V12L2

Dimensions

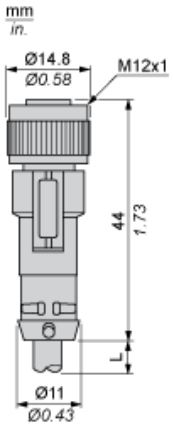

L : Lenght of cable

XZCPV11V12L2

Connections and Schemes

Connectors



BU : Blue
BN : Brown
BK : Black
GY : Grey
BK/WH : Black / White