



Project: _____

Fixture Type: _____

Location: _____


Contact/Phone: _____

5" UNIVERSAL IC HOUSING

INCANDESCENT LAMPS

IC20

PRODUCT DESCRIPTION

IC Air-Loc® Housing • Energy efficient, sealed housing • Can be completely covered with insulation • When used with Air-Loc Gasket (see accessories), stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol  do not require a gasket.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see reverse.

Socket Medium base porcelain with nickel-plated copper screw shell • Drop socket with spring to accommodate certain trim installation.

Trims Trim selection shown on reverse.

Labels U.L. listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps • Union made • UL Listed/CSA certified • Trims 210N, 211 and 212N are wet location approved for covered ceiling applications • Trims 215 and 216 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps.**

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

INSTALLATION



Real Nail 3 Bar Hangers Telescoping, Patented (US Patent D552,969) Real Nail 3 system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to mounting frame • Edge-mounted for extra strength • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Quick-Loc slot (location identified on the mounting frame) and oversized locking set screw lock fixture in position • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.

Junction Box Pre-wired junction box provided with (5) 1/2" and (1) 3/4" knockouts, (4) Non-metallic sheathed cable connectors and ground wire, U.L. listed/CSA certified for through-branch wiring, maximum 8 No. 12 AWG 90° C branch circuit conductors (4 in, 4 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing and bar hangers) fully assembled for ease of installation • Sight lines embossed on mounting frame to allow for easy viewing when aligning fixtures.

Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness.

DIMENSIONS

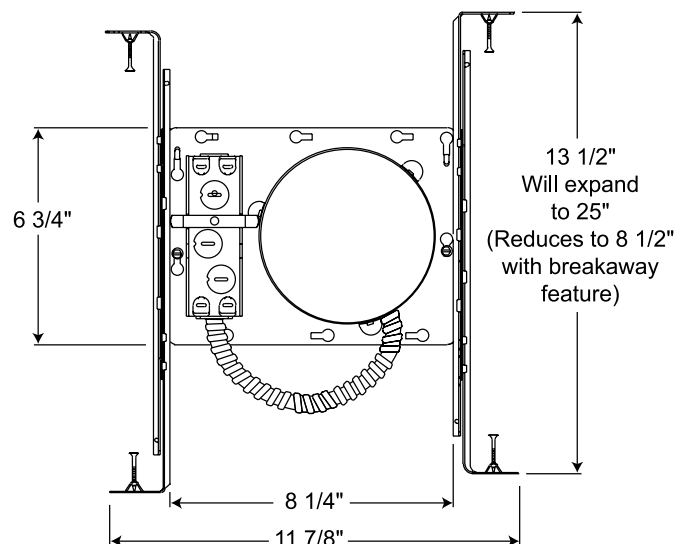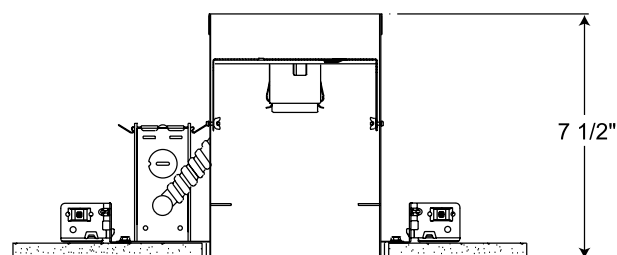

5 5/8" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
ALG5	Air-Loc Gasket

To order, specify catalog number.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
IC20	120V	A19/BR30/PAR20/PAR30/PAR30L/R20/R30 (See reverse for max. trim rating)
















REV-5/15

5" UNIVERSAL IC HOUSING

INCANDESCENT LAMPS

IC20

TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
	201N-WH	Open Frame	65W BR30
** 	205B-WH	BR30/PAR30 Black Baffle	50W PAR30
	205W-WH	BR30/PAR30 White Baffle	
	205B-SC	BR30/PAR30 Black Baffle	
	205B-ABZ	BR30/PAR30 Black Baffle	
** 	204C-WH	BR30/PAR30 Cone - Clear Alzak®	50W PAR30
	204G-WH	BR30/PAR30 Cone - Gold Alzak®	
	204B-WH	BR30/PAR30 Cone - Black Alzak®	
	204PT-SC	BR30/PAR30 Cone - Pewter Alzak®	
	204HZ-WH	BR30/PAR30 Cone - Haze	
	204W-WH	BR30/PAR30 Cone - Gloss White	
	204WHZ-WH	BR30/PAR30 Cone - Wheat Haze	
	204WHZ-ABZ	BR30/PAR30 Cone - Wheat Haze	
** 	206C-WH	Deep Cone - Clear Alzak®	50W PAR30
	206G-WH	Deep Cone - Gold Alzak®	
	206B-WH	Deep Cone - Black Alzak®	
	206PT-SC	Deep Cone - Pewter Alzak®	
	206HZ-WH	Deep Cone - Haze	
	206WHZ-WH	Deep Cone - Wheat Haze	
** 	207C-WH	Cone - Clear Alzak®	50W PAR20/R20
	207G-WH	Cone - Gold Alzak®	
	207B-WH	Cone - Black Alzak®	
	207W-WH	Cone - Gloss White	
	207HZ-WH	Cone - Haze	
	207WHZ-WH	Cone - Wheat Haze	
Air-LOC 	215B-WH ♦♦	BR30/PAR30 Black Baffle	65W BR30, 75W PAR30L, 75W PAR30 w/Socket Extender
	215W-WH ♦♦	BR30/PAR30 White Baffle	
Air-LOC 	216C-WH ♦♦	Cone - Clear Alzak®	65W BR30, 75W PAR30L, 75W PAR30 w/Socket Extender,
	216G-WH ♦♦	Cone - Gold Alzak®	
	216W-WH ♦♦	Cone - Gloss White	
	216HZ-WH ♦♦	Cone - Haze	
	216WHZ-WH ♦♦	Cone - Wheat Haze	
	208NB-WH	Eyeball with Black Baffle	50W PAR20/R20
	208NW-WH	Eyeball with White Baffle	
	529-WH	PAR30 Eyeball	75W PAR30
	529-SC	PAR30 Eyeball	
	529-ABZ	PAR30 Eyeball	
	209N-WH	Gimbal Ring with Flat Trim	75W PAR30
	688B-WH	Gimbal Ring with Black Baffle	50W PAR30
	688W-WH	Gimbal Ring with White Baffle	
	689C-WH	Gimbal Ring in Clear Cone	50W PAR30
	689G-WH	Gimbal Ring in Gold Cone	
	689HZ-WH	Gimbal Ring in Haze Cone	
	689WHZ-WH	Gimbal Ring in Wheat Haze Cone	
	689WHZ-ABZ	Gimbal Ring in Wheat Haze Cone	
Air-LOC 	210N-WH ♦	Lensed Shower/Closet Light	40W A19
	210N-SC ♦	Lensed Shower/Closet Light	
	210N-ABZ ♦	Lensed Shower/Closet Light	
Air-LOC 	211-PW ♦	Shower Trim	40W A19
Air-LOC 	212N-WH ♦	Shower Trim	40W A15, 50W PAR30
	212N-SC ♦	Shower Trim	
	212N-ABZ ♦	Shower Trim	

Trim Size: 6¼" O.D. (except Cat No. 529 - 6½" O.D.)
Trim Finish: ABZ - Classic Aged Bronze, BL - Black, GP - Graphite,
PW - Plastic White (Polycarbonate material shower trim),
SC - Satin Chrome, SL - Silver, WH - White.
Alzak is a registered trademark of Alcoa Corp.
Note: In Canada when insulation is present, Type IC fixtures must be used.

Air-LOC JUNO IC housings meet IECC Energy Code requirements per ASTM E283.
Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

♦ UL Listed for use in wet location.

♦♦ UL Listed for use in wet location with outdoor rated lamp.

** NOTE: TR5 Trim Ring compatible with 204, 205, 206, 207 trims.