
UQX2XLCHF



Ultra Low Loss OM4 MPO24 Pinned to LC 24-Fiber Plenum Array Cord

Product Classification

Regional Availability

Asia | Australia/New Zealand | Europe | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

Product Type Fiber array cable assembly

Product Brand SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

General Specifications

Color, boot A Red

Color, boot B Aqua

Color, connector A Aqua

Color, connector B Beige

Construction Type Stranded

Fibers per Subunit, quantity 24

Furcation Color Aqua

Interface, Connector A MPO-24/UPC

Interface, Connector B LC/UPC

Jacket Color Aqua

Polarity Method B Enhanced (ULL)

Total Fibers, quantity 24

Dimensions

Breakout Length 12 in | 24 in | 36 in | 48 in | 60 in | 72 in


COMMSCOPE®

UQX2XLCHF

Cable Assembly Length Range (m) 1 - 304

Cable Assembly Length Range (ft) 2 - 999

Ordering Tree

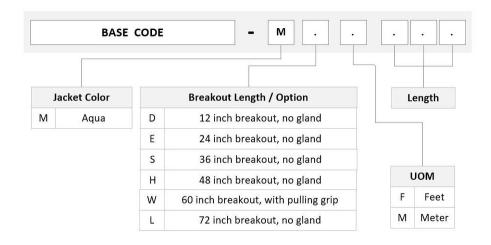

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Indoor | Plenum

Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system



Included Products

COMMSCOPE®

UQX2XLCHF

760161901 – LazrSPEED® Plenum MPO Light Duty Patchcord Cable, 24

P-024-MP-5K-F36AQ fibe

860634625 – LazrSPEED® Elite MPO Male 24 Fiber Connector, lime green

860637425 – LC/UPC Connector, Multimode, Beige, Short Boot

