

Silva High PL-SILVA-H-BK

Product Finishes:




Specifications:

Voltage: 12V AC
Wattage: 1.5
Volt Amps: 2.5
Lumens: 60
Color Temp: 2700k
IP Rating: 65
CRI: 92.5
Light Source: Integrated


Material: Anodized Aluminum
Cable Length: 24”
Lux (lx): 9.7
Candelas (cd): 38
Rated Life: 50,000 hours
Warranty: 7-year comprehensive
Dimmable: No
Color-Changing: No

Product Uses:
Pathways, Bushes, Garden
Beds, Driveways, Grasses

152mm/6.0"x100mm/3.94"

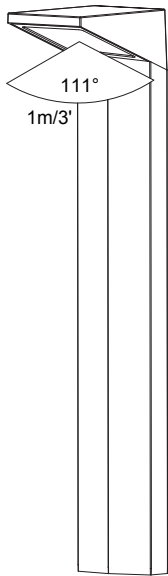

610 mm / 24.0"

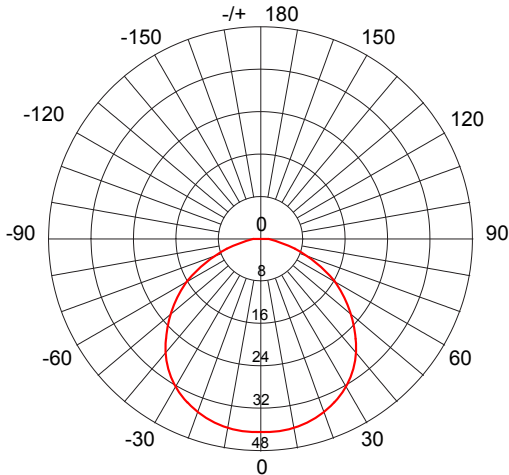

UNIT:cd
— C0/180, 110.6

AVERAGE BEAM ANGLE (50%): 110.6 DEG

Max. Luminous intensity : 38 cd

DISTANCE (FT)	CENTER BEAM (FC) Eavg/Emax	ILLUMINANCE - CONE OF LIGHT	BEAM DIAMETER (FT)
1	10.88/40.79		1.72
1.5	2.04/7.21		2.58
3	0.51/1.8		5.19
5	0.25/0.88		9.0
6.5	0.14/0.50		11.25

AVERAGE BEAM ANGLE 0/180 (50%): 110.6 DEG