

Project: _____

Type: _____

Drawn by: _____ Catalogue #: _____

Date: _____

Individual Spec Sheet

LPDL™ CHOICE

LED LOW PROFILE DOWNLIGHT

ORDERING INFORMATION

Order code: 68308
Model number: LPDL4R-11A-3CBN/CHOICE
UPC: 69549015869
Case quantity: 32

PHYSICAL DATA

Size in. (mm): 4 3/4 (120)
Shape: Round
Finish: Brushed Nickel
Lens type: Frosted polycarbonate
Mounting: Recessed
Cable Rating: FT4

PERFORMANCE DATA

Watts (W): 11
Volts (VAC): 120
Colour temperature (K)¹: 2 700 / 3 000 / 4 000
Lumen output (lm)²: 700 / 750 / 750
Lumen per Watts (lm/W): 63 / 68 / 68
CRI: 80+
Life L70 (h)³: 54 000
Beam angle (°): 100
Environment: Damp location
Dimming: Phase-Cut (ELV / Triac)
THD (%): <15%
Power factor: >0.9
Frequency (Hz): 60
Operating temp. range: -30 °C to 40 °C (-22 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

COMPATIBLE ACCESSORIES

| Order code | Model number | Type |
|------------|---------------------------------|---------------------------------|
| 66051 | ACC/MPLATE/4.25/SQR/STD | Square mounting plate |
| 66058 | ACC/MPLATE/4.25/ADJ/STD | Adjustable mounting plate |
| 66821 | ACC/MPLATE/4.25IN/HANG.BARS/STD | Mounting plate with hanger bars |
| 66143 | ACC/4/VAPOR BARRIER/STD | Vapor barrier extender |
| 64264 | LPDL/ACC/6FT/EXTCABLE/STD | 6' extension cord |



quick
ship



LED
fixture



dimming



airtight



damp
location



IC
rated



ICES
005



2 700/3 000/4 000 K



Intertek




This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

COMPATIBLE DIMMERS

| Brand | Model |
|---------|--|
| LUTRON | RRD-6NA, PD-6WCL, DVCL-153P, CTCL-153P, AYCL-253P, DVRP-253, SELV-300P |
| LEVITON | DSM10-1LZ |

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.


DIMENSIONS

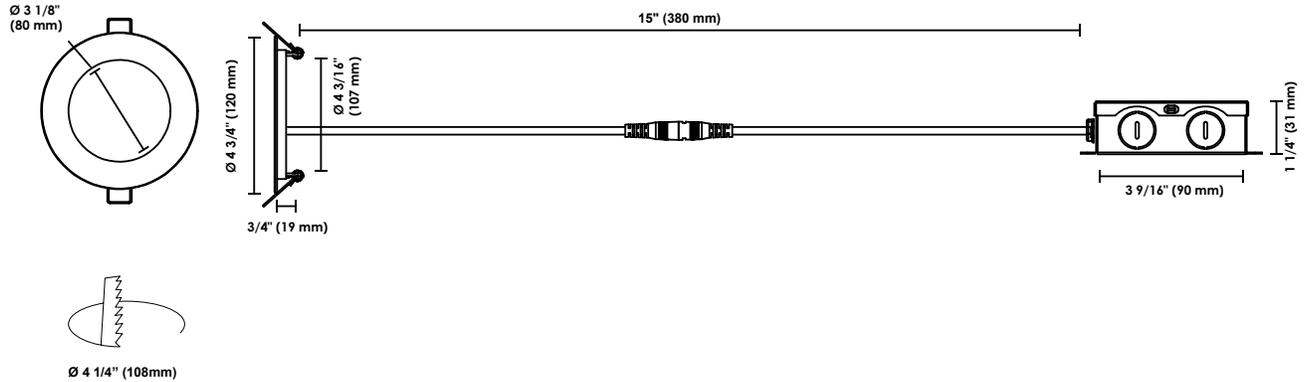

PHOTOMETRIC DATA¹

68308 • LPDL4R-11A-3CBN/CHOICE (30K) • 727.1 lm

Polar candela distribution

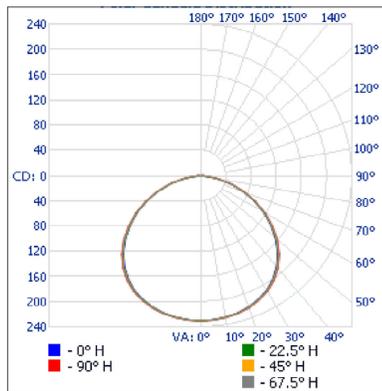

Zonal lumen summary

| Zone | Lumens | % Fixture |
|-------|--------|-----------|
| 0-30 | 186.3 | 25.6% |
| 0-40 | 312.1 | 42.9% |
| 0-60 | 569.0 | 78.3% |
| 60-90 | 158.1 | 21.7% |
| 0-90 | 727.1 | 100% |

Illuminance at a distance

| Center beam fc | Beam width | |
|----------------|------------|-------|
| | 5.8' | 6.1' |
| 1.7' | 79.8 | 11.3' |
| 3.3' | 21.2 | 17.2' |
| 5.0' | 9.22 | 23.0' |
| 6.7' | 5.14 | 28.5' |
| 8.3' | 3.35 | 34.4' |
| 10.0' | 2.31 | 35.6' |

■ Vert. spread: 119.6°
■ Horiz. spread: 121.4°

| Qty | Description | Price |
|-----|-------------|-------|
| | | |

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.