

ORDERING INFORMATION

Order code: 69318
Description: F17T8/30K/8/RS/G13/STD ESV S2
UPC: 069549026285
Case quantity: 25

PERFORMANCE DATA


Shape: T8
Base: G13 (Med Bipin)
Starting method: Program Start (PS)
Wattage (W): 17
Colour temperature (K): 3 000
CRI: 85
Rated life on PS/PRS¹ ballast:
 Based on a 3 hour start 30 000
 Based on a 12 hour start 35 000
Initial lumens (lm): 1 400
Mean lumens (lm): 1 330
Nominal efficiency (lm/W): 82
TCLP compliant: Yes
Phosphor composition: Triphosphor
Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10




Nominal length : 24 in. (610 mm)
 Dia. : 1 in. (26 mm)

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.
² The minimum starting temperature is a function of the ballast.

DIMENSIONS

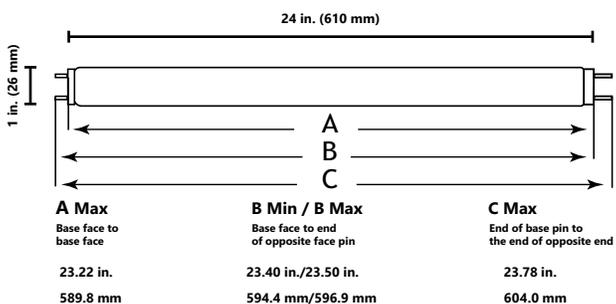

SPECTRAL DISTRIBUTION

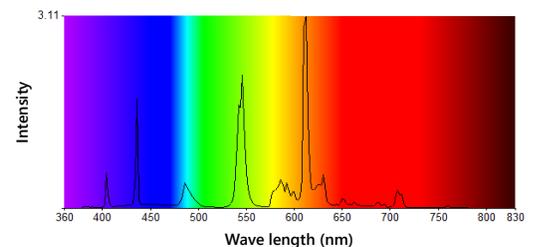

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.