

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

**INTENDED USE** — The OLF provides years of maintenance-free general illumination for residential and commercial outdoor applications such as yards, driveways, patios, loading areas and warehouses.

**CONSTRUCTION** — Rugged cast-aluminum, corrosion-resistant rear housing and lamp heads thermally isolate the LEDs and driver promoting long life.

OMS1000 motion detection head with 180-degree detection and up to 70-ft. forward motion detection.

120V driver operates at 60 Hz.

19 watts, .941 amps.

Operating temperature -30°C to 40°C.

**OPTICS** — High-performance LEDs produce nearly 1600 lumens and maintain 70% of light output at 50,000 hours of service. (LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.)

Removable aluminum visors allow for maximum brightness or “neighbor-friendly” shading.

4000K CCT.

See Lighting Facts labels for specific fixture performance.

**INSTALLATION** — Designed for wall- or eave-mounting to existing junction box (provided by others). Mount 6-10 feet high for optimum range and detection.

**LISTINGS** — UL Certified to US and Canadian safety standards for wet-location mounting higher than 4 feet off the ground.

Tested in accordance with IESNA LM-79 and LM-80 standards.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)


Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.

Outdoor General Purpose

# OLF

LED MOTION SECURITY FLOODLIGHT

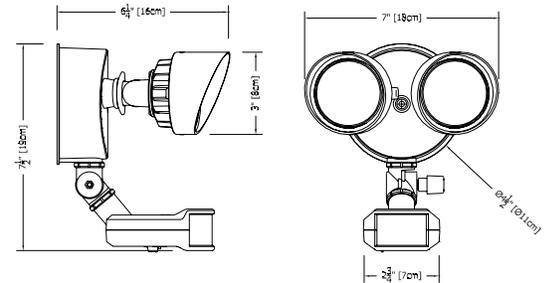

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

For shortest lead times, configure product using standard options (shown in bold).

**Example:** OLF 2RH 40K 120V MO BZ

Series	Light Heads	Color Temperature <sup>1</sup>	Voltage	Controls	Finish
<b>OLF</b>	<b>2RH</b> 2 heads, round	<b>40K</b> 4000K	<b>120</b> 120V	<b>MO</b> PIR motion detection with photocell	BZ Bronze WH White

**Notes**

<sup>1</sup> Nominal correlated color temperature (CCT) per ANSI C78.377-2008.

# OLF Outdoor LED Motion Security Floodlight

## PHOTOMETRICS

To see complete photometric reports or download .ies files for this product, visit [www.lithonia.com](http://www.lithonia.com)

OLF

