

BMXAMO0802H

analog non isolated high level output module,
Modicon X80, 8 outputs, 0 to 20mA, 4 to 20mA,
for severe environments



Main

| | |
|------------------------------|-------------------------|
| Range of Product | Modicon X80 |
| Product or Component Type | Analog output module |
| Product Specific Application | For severe environments |
| Electrical connection | 20 ways 1 connector |
| Isolation between channels | Non isolated |

Complementary

| | |
|-------------------------------|---|
| Measurement error | $\leq 0.45\%$ of full scale - 25...70 °C 0.1 % of full scale 25 °C |
| Temperature drift | 45 ppm/°C 0...20 mA 45 ppm/°C 4...20 mA |
| Minimum crosstalk attenuation | 80 dB |
| Common mode rejection | 80 dB |
| Isolation voltage | 1400 V DC between channels and ground 1400 V DC between channels and bus |
| Detection type | Open circuit 4...20 mA Short circuit 0...20 mA |
| Load impedance ohmic | $\leq 350\ \Omega$ 0...20 mA $\leq 350\ \Omega$ 4...20 mA |
| Analogue output number | 8 |
| Analogue output type | Current 0...20 mA Current 4...20 mA |
| Analogue output resolution | 16 bits |
| Supply | Internal power supply via rack |
| Conversion time | $\leq 4\ \text{ms}$ |
| Maximum conversion value | 0...21 mA 0...20 mA 0...21 mA 4...20 mA |
| Fallback mode | Configurable Predefined |
| MTBF reliability | 1500000 H |
| Operating altitude | 0...6561.68 ft (0...2000 m) 2000...5000 m with derating factor |
| Status LED | 1 LED (Green) RUN 1 LED per channel (Green) channel diagnostic 1 LED (Red) ERR 1 LED (Red) I/O |
| Net Weight | 0.33 lb(US) (0.15 kg) |
| Power consumption in W | 3.6 W 24 V DC typical 3.9 W 24 V DC maximum 0.35 W 3.3 V DC typical 0.48 W 3.3 V DC maximum |
| Current consumption | 150 mA 3.3 V DC 135 mA 24 V DC |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

| | |
|---------------------------------------|---|
| Vibration resistance | 3 gn |
| Shock resistance | 30 gn |
| Ambient Air Temperature for Storage | -40...185 °F (-40...85 °C) |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C) |
| Relative humidity | 5...95 % 131 °F (55 °C) without condensation |
| IP Degree of Protection | IP20 |
| Product Certifications | Merchant Navy[RETURN]ATEX[RETURN]CE[RETURN]CSA[RETURN]EAC[RETURN]RCM[RETURN]IEC-Ex[RETURN]UL |
| Standards | EN 61131-2 EN 61000-6-4 EN 61000-6-2 EN 61010-2-201 |
| Environmental characteristic | Gas resistant class Gx Gas resistant class 3C4 Dust resistant class 3S4 Sand resistant class 3S4 Salt resistant level 2 Mold growth resistant class 3B2 Fungal spore resistant class 3B2 Hazardous location class I division 2 |
| Protective treatment | Conformal coating |




Ordering and shipping details

| | |
|-------------------|--------------------|
| Category | 18160-MODICON M340 |
| Discount Schedule | PC34 |
| GTIN | 3606489698645 |
| Returnability | No |

Packing Units


| | |
|------------------------------|------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 2.09 in (5.300 cm) |
| Package 1 Width | 4.33 in (11.000 cm) |
| Package 1 Length | 4.53 in (11.500 cm) |
| Package 1 Weight | 6.35 oz (180.000 g) |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 15 |
| Package 2 Height | 5.91 in (15.000 cm) |
| Package 2 Width | 11.81 in (30.000 cm) |
| Package 2 Length | 15.75 in (40.000 cm) |
| Package 2 Weight | 6.79 lb(US) (3.080 kg) |

Offer Sustainability

| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation |  REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| Mercury free | Yes |
| China RoHS Regulation |  China RoHS Declaration |
| RoHS exemption information |  Yes |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Modules Mounted on Racks

Dimensions

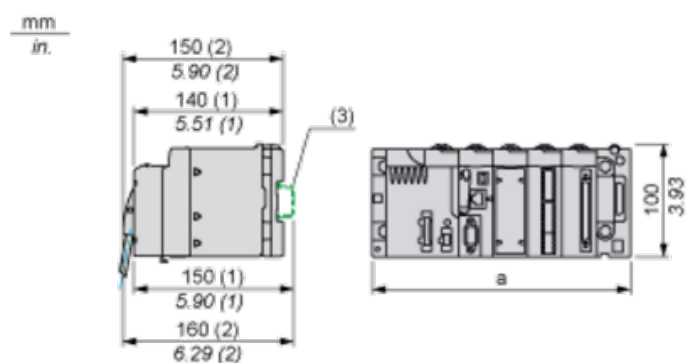


(1) With removable terminal block (cage, screw or spring).

(2) With FCN connector.

(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

| Rack references | a in mm | a in in. |
|----------------------------|---------|----------|
| BMXXBP0400 and BMXXBP0400H | 242.4 | 09.54 |
| BMXXBP0600 and BMXXBP0600H | 307.6 | 12.11 |
| BMXXBP0800 and BMXXBP0800H | 372.8 | 14.68 |
| BMXXBP1200 and BMXXBP1200H | 503.2 | 19.81 |

Wiring Diagram

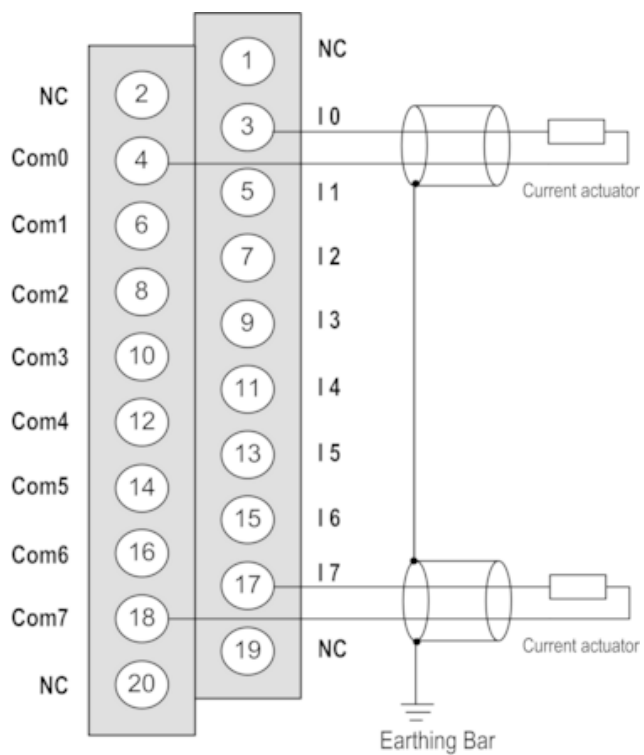

I_x + pole input for channel x.

COM_x - pole input for channel x, COM_x are connected together internally.

The current loop is self-powered by the output and does not request any external supply.