
wirewerks

HORIZONTAL CABLE MANAGER

PDS-0227

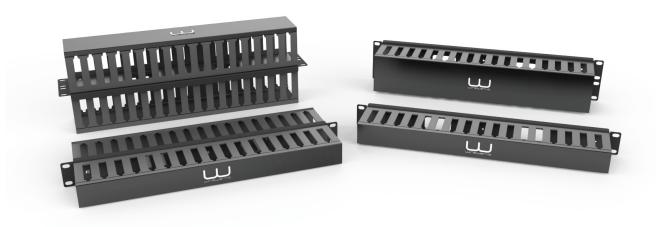

DESCRIPTION

Wirewerks 1U and 2U Horizontal Cable Management panels ensure optimal cable radius to prevent deterioration or breakage. Flexible fingers maximize the access and protection of the cables, keeping the structured cabling system organized and functional.

FEATURES and BENEFITS

- Minimize downtime
- Designed to meet ANSI/TIA/EIA installation guidelines
- Flexible fingers allow for easy installation, removal and maintenance of cables
- Save valuable space in tight telecom closets

APPLICATIONS

- Telecommunication Rooms
- Commercial Building/Enterprise LANs
- Data Centers and SANs
- CATV, Headend, Central Office
- Any application requiring horizontal cable management in standard 19" rack



ORDERING INFORMATION

| Part Number | Description | |
|-------------|--|--|
| WW001701 | Horizontal Cable Manager 19" Rackmount, Single-Sided, 1U | |
| WW001702 | Horizontal Cable Manager 19" Rackmount, Single-Sided, 2U | |
| WW001711 | Horizontal Cable Manager 19" Rackmount, Double-Sided, 1U | |
| WW001712 | Horizontal Cable Manager 19" Rackmount, Double-Sided, 2U | |

INCLUDED

| Part Number | Included | |
|--|-------------------------------------|--|
| WW001701 WW001702 WW001711 WW001712 | Horizontal Cable Manager | |
| | 4 x Philips Screw 12-24 x 1/2" long | |
| | 4 x Philips Screw 10-32 x 1/2" long | |

PACKAGING and SHIPPING

| Description | |
|---------------------------|--|
| Cardboard box: 1 unit/box | |

PHYSICAL SPECIFICATIONS

| Part Number / Attribute | | Value | |
|-------------------------|------------|--|--|
| WW001701 | Dimensions | 19" x 3.7" x 1.75" (483mm x 94.0mm x 44.5mm) | |
| | Weight | 1.4lbs (0.64kg) | |
| WW001702 | Dimensions | 19" x 3.7" x 3.5" (483mm x 94.0mm x 88.9mm) | |
| | Weight | 1.9lbs (0.86kg) | |
| WW001711 | Dimensions | 19" x 7" x 1.75" (483mm x 178mm x 44.5mm) | |
| | Weight | 1.9lbs (0.86kg) | |
| WW001712 | Dimensions | 19" x 7" x 3.5" (483mm x 178mm x 88.9mm) | |
| | Weight | 2.4lbs (1.1kg) | |
| Plastic Materials | | UL 94V-0 ABS thermoplastic | |
| Panel Materials | | 16 Gauge cold rolled steel (CRS) | |
| Panel Finish | | Black | |



MECHANICAL SPECIFICATIONS

| Parameter | Value |
|-----------------------|-------------------------------|
| Operating Temperature | 20°C (68°F) ~ -40°C (-40° F) |
| Storage Temperature | -40°C (-40°F) ~ 125°C (257°F) |

STANDARDS COMPLIANCE

RoHS

Directive on Restriction of Hazardous Substances

CEA/EIA-310

Cabinets, Racks, Panels and Associated Equipment Standard

UL94UL

Tests for Flammability of Plastic Material for Parts in Devices and Appliances