

| |
|----------------|
| Catalog Number |
| Notes |
| Type |

FEATURES & SPECIFICATIONS

INTENDED USE — SBL LED wraparound provides a digital lighting platform to deliver general ambient lighting for surface-mount applications. The SBL provides a similar look to that of an existing fluorescent wrap with all of the excellent benefits of LED: energy savings, long life, and maintenance savings. Ideal for closets, storage rooms, and offices.

CONSTRUCTION — Linear side prisms control brightness, pyramidal bottom prisms minimize lamp image. Continuous side flanges on fixture body provide light trap and continuous diffuser support to prevent accidental opening and simplify maintenance. Full depth, white enamel end plates.

Die-formed from code gauge cold-rolled steel. Channel cover snaps into place without the use of tools. Full end cap factory installed to reduce job site labor.

OPTICS — The translucent white diffuser reduces glare and pixilation without impacting performance.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide extended service life. 90% LED lumen maintenance at 50,000 hours (L90/50,000).

LED drivers deliver dimming from 0-10V control signal.

LISTINGS — CSA certified to U.S. and Canadian standards. Damp listed.

WARRANTY — 5-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx


Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.


Contractor Select

SB LED Square-Basket Wraparound

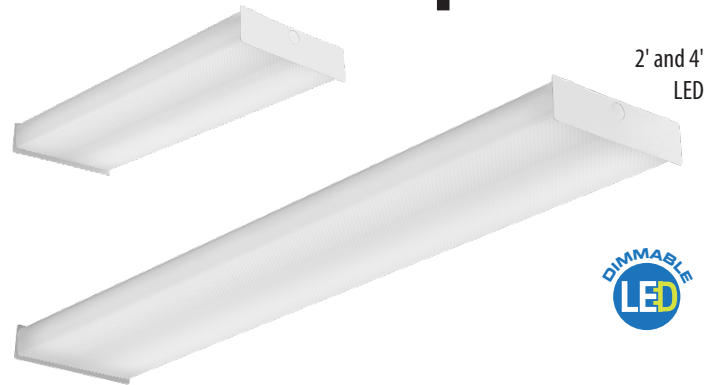

DIMENSIONS

All dimensions are inches (centimeters) unless otherwise noted.

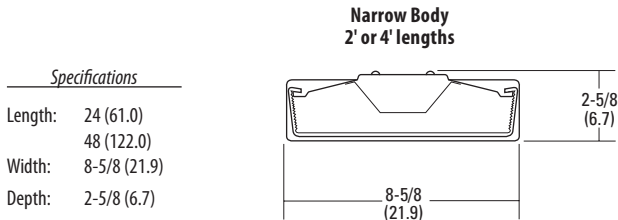


MOUNTING DATA

Individual Installation —

Two single-stem hangers required.

Row Installation —

One hanger per fixture plus one row required.

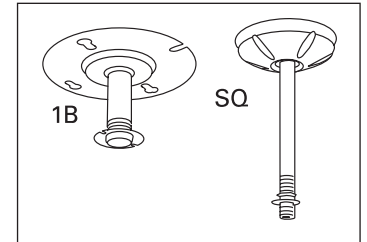

Please see SBL Configurable specification sheet for additional options and lumen packages.

ORDERING INFORMATION

| Catalog number | UPC | Description | Lumens | Color temperature | Voltage | Wattage | Pallet qty | Standard carton qty. |
|-----------------------------|--------------|-------------------|--------|-------------------|---------|---------|------------|----------------------|
| SBL2 LP835 ¹ | 190887819458 | 2' LED Wraparound | 1,937 | 3500 K | 120-277 | 17 | 140 | 1 |
| SBL2 LP840 ¹ | 190887819489 | 2' LED Wraparound | 1,967 | 4000 K | 120-277 | 17 | 140 | 1 |
| SBL4 LP835 ¹ | 190887819410 | 4' LED Wraparound | 3,933 | 3500 K | 120-277 | 32 | 70 | 1 |
| SBL4 LP840 ¹ | 190887819434 | 4' LED Wraparound | 3,994 | 4000 K | 120-277 | 32 | 70 | 1 |
| SBL4 347 LP835 ² | 190887855692 | 4' LED Wraparound | 3,933 | 3500 K | 347 | 32 | 70 | 1 |
| SBL4 347 LP840 ² | 190887856675 | 4' LED Wraparound | 3,994 | 4000 K | 347 | 32 | 70 | 1 |

Notes

- Product in stock.
- Non-stock standard manufacturing lead times apply. Step-down transformer will not fit in SBL2.

SB LED-WRAPAROUND