

OM4 MPO (Unpinned) to LC, InstaPATCH® 360 Ruggedized Fanout Cable, 96-Fiber, Plenum

## Product Classification

Regional Availability	Asia   Australia/New Zealand   China   Europe   India   Latin America   Middle East/Africa   North America
Portfolio	CommScope®
Product Type	Ruggedized fanout
Product Brand	SYSTIMAX InstaPATCH® 360
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications

Color, boot A	Black
Color, boot B	Aqua
Color, connector A	Aqua
Color, connector B	Beige
Construction Type	Stranded
Fibers per Subunit, quantity	12
Furcation Color	Aqua
Interface, Connector A	MPO-12/UPC
Interface, Connector B	LC/UPC
Jacket Color	Aqua
Polarity	Method B (LL)
Total Fibers, quantity	96


## Dimensions

Cable Assembly Length Range (m)	3 – 999
---------------------------------	---------

# FLXMPLCAL

Cable Assembly Length Range (ft) 7 – 999

## Ordering Tree

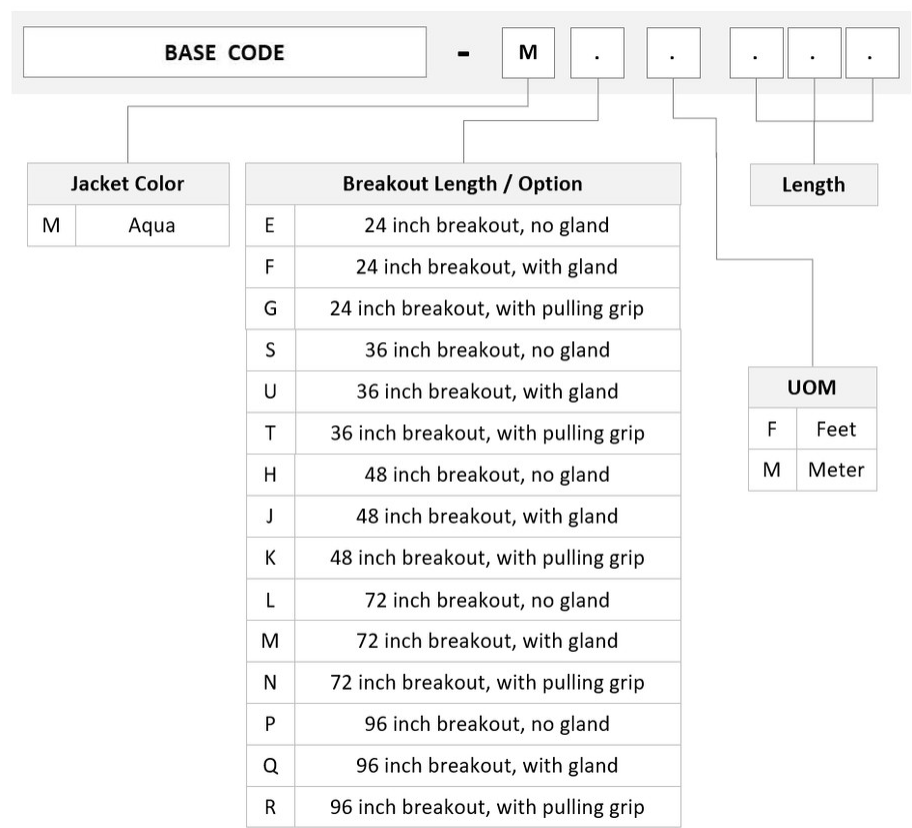

## Mechanical Specifications

**Cable Retention Strength, maximum** 11.24 lb @ 0 ° | 4.40 lb @ 90 °

## Optical Specifications

**Fiber Mode** Multimode

**Fiber Type** OM4, LazrSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)

**Environmental Space** Indoor | Plenum

## Regulatory Compliance/Certifications

# FLXMPLCAL

---

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant



## Included Products

760051664	–	LazrSPEED® Plenum MPO Trunk Cable, 96 fiber multi-unit with 12 fiber subunits
P-096-MP-5K-F12AQ		
860637378	–	LazrSPEED® Elite LC Connector duplex for 1.6 mm Fiber, multimode
860647054	–	MP012, LOW LOSS, FEMALE, OM3/4, AQUA, 3mm