TYPE FQN-M FINGRIP™

NYLON FULLY INSULATED MALE QUICK DISCONNECTS

Material: Tin-Plated Brass

600 Volts Max., 105° C Max.

Nylon Fully Insulated Quick disconnects allows for quickly connecting or dis-connecting a terminal. The front end of the terminal has a female-type receptacle which allows the terminal to slide onto and off of a male blade.

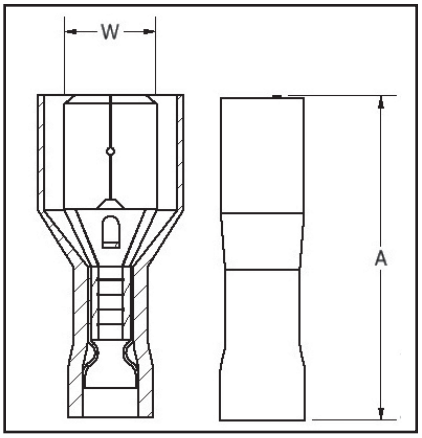

Features & Benefits

- Fully insulated connectors
  - ◊ Eliminate the need for post installation insulation
- Funnel entry barrel opening
  - ◊ Assures quick and easy wire insertion
- Dimpled female socket detent
  - ◊ Ensures firm grip

Catalog Number	Wire Range	NEMA Tab Size	L	W	Installation Tool *	Wire Strip Length	Bulk Catalog Number
FQN18M18X02D*	18 - 22	0.19 X 0.02	0.88	0.19	MRE1022NV Y10D Y1022	3/8"	—
FQN18M25X03D	18 - 22	0.25 X 0.03	0.80	0.25			**FQN18M25X03B**
FQN14M18X02D*	14 - 16	0.19 X 0.02	0.80	0.19			—
FQN14M25X03D	14 - 16	0.25 X 0.03	0.88	0.25			**FQN14M25X03B**
FQN10M25X03D	10 - 12	0.25 X 0.03	0.96	0.25	MRE1022NV		**FQN10M25X03B**

* Not cULus.