TS 35X15/6X25 2M/ST/ZN

Product image

Similar to illustration

Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

General ordering data

Version	Terminal rail, Accessories, Steel, galvanic zinc plated and passivated, Width: 2000 mm, Height: 35 mm, Depth: 15 mm, Slit width: 6.30 mm, Slit length: 25.00 mm
Order No.	1866290000
Type	TS 35X15/6X25 2M/ST/ZN
GTIN (EAN)	4032248435388
Qty.	2 m

Date de création 26 novembre 2024 14:12:10 CET

Weidmüller ⧈

TS 35X15/6X25 2M/ST/ZN

Caractéristiques techniques

Dimensions and weights

Depth	15 mm	Depth (inches)	0,591 inch
Height	35 mm	Height (inches)	1,378 inch
Width	2 000 mm	Width (inches)	78,74 inch
Net weight	620 g		

Mounting rail

Installation advice	Direct mounting		
Length of the terminal rail	min.		0 mm
	nominal		2 000 mm
	max.		2 000 mm
Material	Steel		
Pre-punched mounting rail	Yes		
Short circuit strength corresponds to E-Cu wire	50 mm²		
Short-time withstand current per second according to IEC 60947-7-2	6 kA		
Slit gap	11 mm		
Slit gap			
Slit length	25 mm		
Slit length			
Slit width	6,3 mm		
Slit width			
Slotted drill holes	Yes		
Spacing of holes, centre-to-centre	36 mm		
Standards	In accordance with DIN EN 60715		
Surface finish	galvanic zinc plated and passivated		

Classifications

ETIM 6.0	EC001285	ETIM 7.0	EC001285
ETIM 8.0	EC001285	ETIM 9.0	EC001285
ECLASS 9.0	27-40-06-02	ECLASS 9.1	27-40-06-02
ECLASS 10.0	27-40-06-02	ECLASS 11.0	27-40-06-02
ECLASS 12.0	27-40-06-02	ECLASS 13.0	27-40-06-02
ECLASS 14.0	27-40-06-02		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

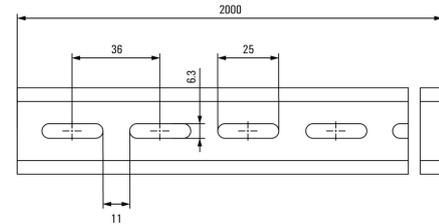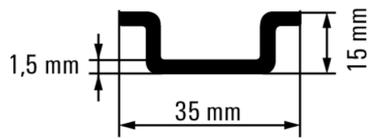|	
ROHS	Conform

Downloads

Engineering Data	CAD data – STEP
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format
Brochures	

Date de création 26 novembre 2024 14:12:11 CET

Weidmüller ƎE

TS 35X15/6X25 2M/ST/ZN

Dessins

Product image

Similar to illustration