

BCH2LD0233CF5C

servo motor BCH, Lexium 28, 60mm, 200W,
0.17kg.cm², with oil seal, with key, brake, leads
connection



Main

Range Compatibility	Lexium 28
Product or Component Type	Servo motor
Device short name	BCH2

Complementary

Maximum mechanical speed	5000 rpm
[Us] rated supply voltage	220 V 110 V
Phase	Three phase Single phase
Continuous stall current	1.11 A
Continuous stall torque	5.66 Lbf.In (0.64 N.m) LXM26D 1.5 A, 220 V, single phase 5.66 Lbf.In (0.64 N.m) LXM26D 1.5 A, 220 V, three phase 5.66 Lbf.In (0.64 N.m) LXM28... 1.5 A, 220 V, single phase 5.66 Lbf.In (0.64 N.m) LXM28... 1.5 A, 220 V, three phase 5.66 lbf.in (0.64 N.m) LXM28... 3.6 A, 110 V, single phase
Continuous power	200 W
Peak stall torque	16.99 Lbf.In (1.92 N.m) LXM26D 1.5 A, 220 V, single phase 16.99 Lbf.In (1.92 N.m) LXM26D 1.5 A, 220 V, three phase 16.99 Lbf.In (1.92 N.m) LXM28... 1.5 A, 220 V, single phase 16.99 Lbf.In (1.92 N.m) LXM28... 1.5 A, 220 V, three phase 16.99 lbf.in (1.92 N.m) LXM28... 3.6 A, 110 V, single phase
Nominal output power	200 W LXM26D 1.5 A, 220 V, single phase 200 W LXM26D 1.5 A, 220 V, three phase 200 W LXM28... 1.5 A, 220 V, single phase 200 W LXM28... 1.5 A, 220 V, three phase 200 W LXM28... 3.6 A, 110 V, single phase
Nominal torque	5.66 Lbf.In (0.64 N.m) LXM26D 1.5 A, 220 V, single phase 5.66 Lbf.In (0.64 N.m) LXM26D 1.5 A, 220 V, three phase 5.66 Lbf.In (0.64 N.m) LXM28... 1.5 A, 220 V, single phase 5.66 Lbf.In (0.64 N.m) LXM28... 1.5 A, 220 V, three phase 5.66 lbf.in (0.64 N.m) LXM28... 3.6 A, 110 V, single phase
Nominal speed	3000 rpm LXM26D 1.5 A, 220 V, single phase 3000 rpm LXM26D 1.5 A, 220 V, three phase 3000 rpm LXM28... 1.5 A, 220 V, single phase 3000 rpm LXM28... 1.5 A, 220 V, three phase 3000 rpm LXM28... 3.6 A, 110 V, single phase
Maximum current Irms	4.31 A LXM28... 0.2 kW, 220 V 4.31 A LXM28... 0.2 kW, 110 V
Maximum permanent current	1.3 A
Product compatibility	LXM26D servo drive 0.2 kW, 220 V, single phase LXM26D servo drive 0.2 kW, 220 V, three phase LXM28... servo drive 0.2 kW, 220 V, single phase LXM28... servo drive 0.2 kW, 220 V, three phase LXM28... servo drive 0.2 kW, 110 V, single phase
Shaft end	Keyed

Shaft diameter	0.55 in (14 mm)
Shaft length	1.18 in (30 mm)
Key width	0.20 in (5 mm)
Feedback type	20 bits single turn absolute encoder
Holding brake	With
Holding torque	11.51 lbf.in (1.3 N.m) built-in
Mounting Support	Asian standard flange
Motor flange size	2.36 in (60 mm)
Electrical connection	Free lead
Torque constant	0.58 N.m/A 68 °F (20 °C)
Back emf constant	35 V/krpm 68 °F (20 °C)
Rotor inertia	0.17 kg.cm ²
Stator resistance	12.2 Ohm 68 °F (20 °C)
Stator inductance	22.5 mH 68 °F (20 °C)
Stator electrical time constant	1.84 ms 68 °F (20 °C)
Maximum radial force Fr	200 N 3000 rpm
Maximum axial force Fa	70 N
Brake pull-in power	11.2 W
Type of cooling	Natural convection
Length	5.51 in (140 mm)
Number of motor stacks	1
Centring collar diameter	1.97 in (50 mm)
Centring collar depth	0.22 in (5.5 mm)
Number of mounting holes	4
Mounting holes diameter	0.22 in (5.5 mm)
Circle diameter of the mounting holes	2.76 in (70 mm)
Distance shaft shoulder-flange	0.22 in (5.5 mm)
Net Weight	3.31 lb(US) (1.5 kg)

Environment

IP Degree of Protection	IP50 IM V3 IP65 IM B5, IM V1
Ambient Air Temperature for Operation	32...104 °F (0...40 °C)

Ordering and shipping details

Category	18281-LEXIUM 23/28 MOTORS
Discount Schedule	PC53
GTIN	3606480733550
Returnability	No
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.37 in (11.1 cm)
Package 1 Width	5.71 in (14.5 cm)
Package 1 Length	10.43 in (26.5 cm)
Package 1 Weight	4.59 lb(US) (2.08 kg)
Unit Type of Package 2	CAR
Number of Units in Package 2	5
Package 2 Height	11.81 in (30 cm)
Package 2 Width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	25.10 lb(US) (11.387 kg)
Unit Type of Package 3	PAL


Number of Units in Package 3	40
Package 3 Height	23.62 in (60 cm)
Package 3 Width	23.62 in (60 cm)
Package 3 Length	31.50 in (80 cm)
Package 3 Weight	200.83 lb(US) (91.096 kg)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes

Dimensions


Dimensions of Motor

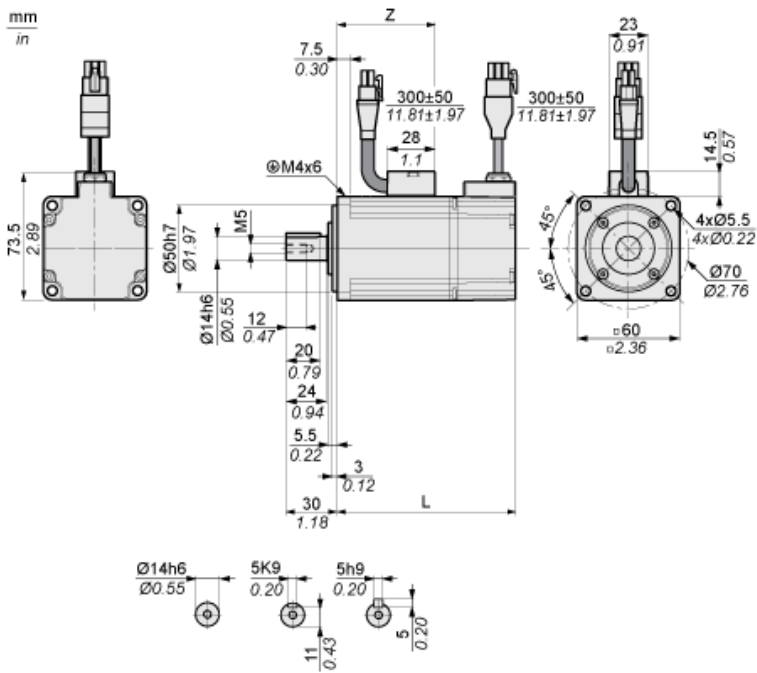

	mm	in.
L (without holding brake)	104	4.09
L (with holding brake)	140	5.51
Z	57	2.24

Torque/Speed Curves with 230 V Single/Three Phase Supply Voltage

Servo Motor with LXM28AU02●●● Servo Drive

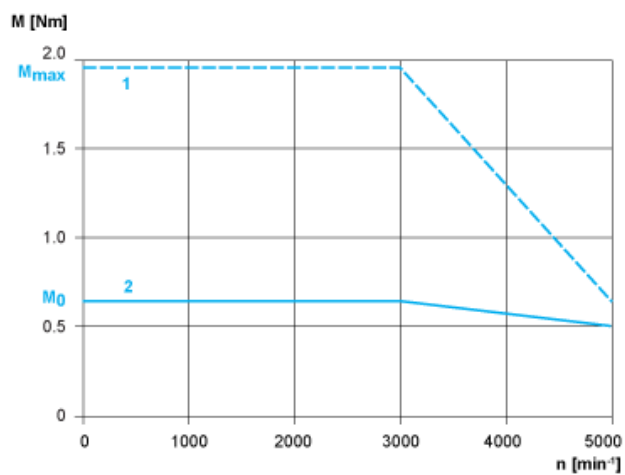

- 1 : Peak torque
2 : Continuous torque