

# BMP0702F3NA2A

synchronous motor - BMP - 480 VAC - 0.55 kW  
- IP65 - IEC



## Main

Product or Component Type	Synchronous motor
Device short name	BMP
Maximum mechanical speed	3600 rpm
Nominal output power	550 W ATV32 0.55 kW 400 V three phase 550 W ATV320 0.55 kW 400 V three phase
Nominal torque	15.49 Lbf.in (1.75 N.m) ATV32 0.55 kW 400 V three phase 15.49 lbf.in (1.75 N.m) ATV320 0.55 kW 400 V three phase
Nominal speed	3000 rpm ATV32 0.55 kW 400 V three phase[RETURN]3000 rpm ATV320 0.55 kW 400 V three phase
Product compatibility	Variable speed drive ATV32 0.55 kW 400 V three phase Variable speed drive ATV320 0.55 kW 380...500 V three phase
Shaft end	Keyed
IP Degree of Protection	IP65 standard IP67 with IP67 kit
Holding brake	Without
Mounting Support	International standard flange
Electrical Connection	Rotatable right-angled connector

## Complementary

Range Compatibility	Altivar Machine ATV320 Altivar 32
[Us] rated supply voltage	480 V
Phase	Three phase
Maximum current Irms	2.9 A ATV32 0.55 kW 400 V three phase 2.9 A ATV320 0.55 kW 400 V three phase
Nominal operating frequency	250 Hz ATV32 0.55 kW 400 V three phase 250 Hz ATV320 0.55 kW 400 V three phase
Minimum operating frequency	25 Hz ATV32 0.55 kW 400 V three phase 25 Hz ATV320 0.55 kW 400 V three phase
Maximum operating frequency	300 Hz ATV32 0.55 kW 400 V three phase 300 Hz ATV320 0.55 kW 400 V three phase
Shaft diameter	0.43 in (11 mm)
Shaft length	0.91 in (23 mm)
Key width	0.16 in (4 mm)
Motor flange size	2.76 in (70 mm)
Torque constant	1.51 N.m/A 104 °F (40 °C)
Number of motor poles	5
Number of motor stacks	2
Rotor inertia	1.13 kg.cm²
Stator resistance	6.96 Ohm 104 °F (40 °C)
Stator inductance	20.7 MH for q-axis winding 104 °F (40 °C) 20.7 mH for d-axis winding 104 °F (40 °C)
Maximum radial force Fr	710 N 1000 rpm 560 N 2000 rpm 490 N 3000 rpm 450 N 4000 rpm

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the Schneider Electric group. It is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Maximum axial force Fa	0.2 x Fr
Type of cooling	Natural convection
Length	6.06 in (154 mm)
Centring collar diameter	2.36 in (60 mm)
Centring collar depth	0.10 in (2.5 mm)
Number of mounting holes	4
Mounting holes diameter	0.22 in (5.5 mm)
Circle diameter of the mounting holes	2.95...3.23 in (75...82 mm)
Net Weight	3.97 lb(US) (1.8 kg)

## Ordering and shipping details

Category	18282-LEXIUM 32 MOTORS
Discount Schedule	PC53
GTIN	3606480564406
Returnability	No
Country of origin	DE

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.53 in (11.5 cm)
Package 1 Width	7.48 in (19.0 cm)
Package 1 Length	15.55 in (39.5 cm)
Package 1 Weight	6.14 lb(US) (2.786 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	6
Package 2 Height	30.31 in (77.0 cm)
Package 2 Width	31.50 in (80.0 cm)
Package 2 Length	23.62 in (60.0 cm)
Package 2 Weight	55.59 lb(US) (25.216 kg)


## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	 <a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 <a href="#">Yes</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
PVC free	Yes


## Contractual warranty

Warranty	18 months
----------	-----------


## Dimensions

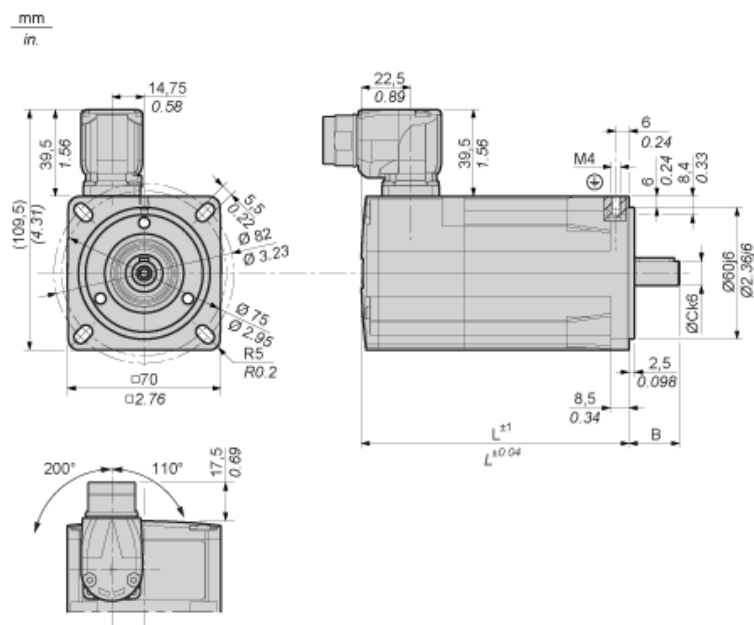

## Parallel Key According to DIN 6885 A

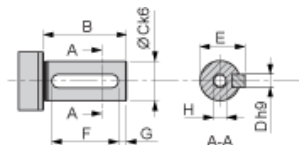

## Female Thread of Shaft According to DIN 332-D




L	mm	154
in.	6.06	
B	mm	23
in.	0.90	
C	mm	11
in.	0.43	
D	mm	4
in.	0.16	
E	mm	12.5
in.	0.49	
F	mm	18
in.	0.71	
G	mm	2.5
in.	0.10	

H		M4
N	mm	2.1
in.	0.08	
O	mm	3.2
in.	0.12	
P	mm	10
in.	0.39	
Q	mm	14
in.	0.55	
S	mm	4.3
in.	0.17	
T	mm	3.3
in.	0.13	

---

Performance curves

---

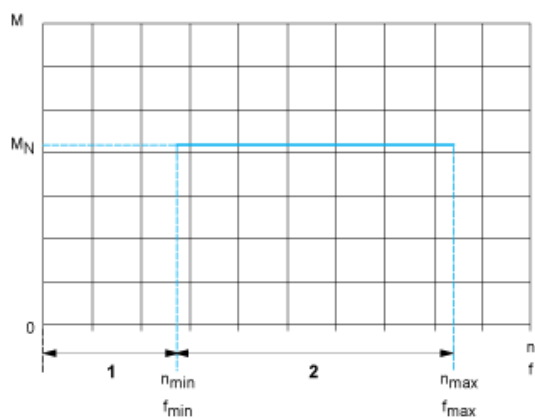

- M : Torque in Nm  
n : Speed in rpm  
f : frequency in Hz  
1 : Only permissible during acceleration and deceleration phases.  
2 : Continuous operation with the default values from the configuration file.