

## Individual Spec Sheet

# WFC

## LED FULL CUTOFF WALL PACK

Selectable color temperature (3 000/4 000/5 000 K)

Power selectable

Integrated photocell

Multi-Voltage (120-347 V)

### ORDERING INFORMATION

Order code:	68607
Model number:	WFC-PS60A3-Q-3C-BR-P
UPC:	069549017757
Case quantity:	1

### PHYSICAL DATA

Dimensions:	14.17" x 9.29" x 6.54" (360 mm x 236 mm x 166 mm)
Lens material:	Clear polycarbonate lens
Housing material:	Die-Cast

### PERFORMANCE DATA

Watts (W):	25/40/60
Volts (V):	120-347
Color temperature (K) <sup>1</sup> :	3 000/4 000/5 000
Lumen output (lm) <sup>2</sup> :	3 625 - 8 220
Efficacy (lm/W):	137 - 145
CRI:	80
Photocell (Yes/No):	Yes
Dimming (Yes/No):	Yes
Power factor:	≥0.9
THD (%):	≤20
Frequency (Hz):	50/60
Surge protection (kV):	4
Operating temp. range:	-40°C to +50°C

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

### COMPATIBLE ACCESSORY

Order code	Description
68609	18" Bronze Metal Backplate



3 000/4 000/5 000 K



power  
selectable



5 yrs  
warranty



quick  
ship



LED  
fixture



dimmable



wet  
location



ICES  
005



IK08



CERTIFIED



RoHS




ida  
DARK SKY APPROVED  
2016

<sup>1</sup> Based on a maximum usage of 12 hours per day.


<sup>2</sup> When the luminaire is set at 3 000 K operation.  
Only model 68607 must be ordered for IDA certification compliance.

## DIMENSIONS

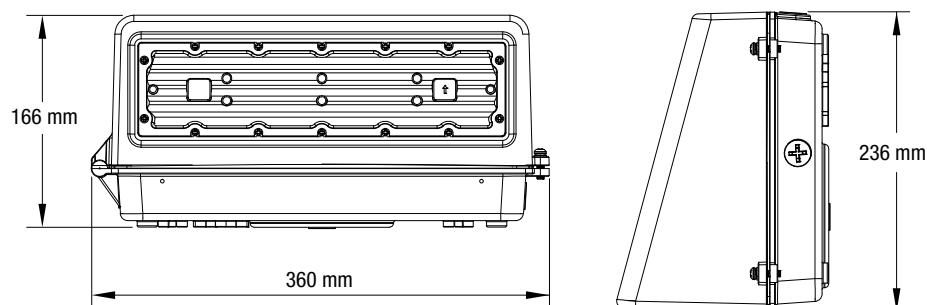PHOTOMETRIC DATA<sup>1</sup>

68607 • WFC-PS60A3-Q-3C-BR-P • 8 209.2 lm

## Polar candela distribution

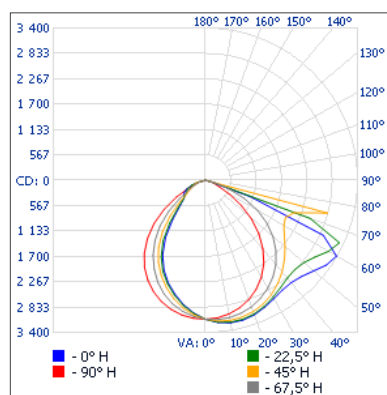

## Zonal lumen summary

Zone	Lumens	% Fixture
0-30	2 360.8	28.8%
0-40	3 799.9	46.3%
0-60	6 542.0	79.7%
60-90	1 667.3	20.3%
70-100	517.5	6.3%
90-120	0	0%
0-90	8 209.2	100%
90-180	0	0%
0-180	8 209.2	100%

## Illuminance at a distance

Center beam fc		Beam width	
17'	10.7	41.6'	40.9'
34'	2.68	83.2'	81.8'
51'	1.19	124.8'	122.7'
68'	0.67	166.4'	163.7'
85'	0.43	208.0'	204.6'
102'	0.30	249.6'	245.5'

Vert. spread: 101.5°  
Horiz. spread: 100.5°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.