

Switches, Double Pole  
20A, 120-277V AC  
HBL® Extra Heavy Duty Industrial Switch

HUBBELL

Features

- Large brass binding head screws with deep slots
- Abuse resistant nylon toggle
- Strip gauge for accurate wiring

Ordering Information

| Description                 | Toggle Color | UPC          | Catalog Number |
|-----------------------------|--------------|--------------|----------------|
| Toggle, back and side wired | Brown        | 783585431604 | HBL1222        |

Listings

UL Listed  
CSA Certified  
Fed. Spec. W-S-896

Specifications


|                 |                |
|-----------------|----------------|
| Top Material    | Thermoset      |
| Base Material   | Thermoset, Red |
| Toggle Material | Nylon          |
| Contacts        | Silver Alloy   |
| Terminal Screws | Brass          |
| Ground Screw    | Brass (Green)  |

Performance

|                         |                                                |
|-------------------------|------------------------------------------------|
| <b>Electrical</b>       |                                                |
| Dielectric Voltage      | Withstands 1500V AC minimum for 1 minute       |
| Max. Continuous Current | 20A                                            |
| Max. Working Voltage    | 277V AC                                        |
| Overload                | Minimum 4.8 times rated current for 100 cycles |
| Temperature Rise        | 30°C maximum at rated current                  |

|                         |                                                                 |
|-------------------------|-----------------------------------------------------------------|
| <b>Mechanical</b>       |                                                                 |
| Terminal Accommodations | #14 AWG min. - #10 AWG max. solid and stranded copper wire only |

|                       |                                                              |
|-----------------------|--------------------------------------------------------------|
| <b>Environmental</b>  |                                                              |
| Flammability          | UL 94V-2                                                     |
| Operating Temperature | Max. continuous: 75°C; Min. continuous: -40°C without impact |

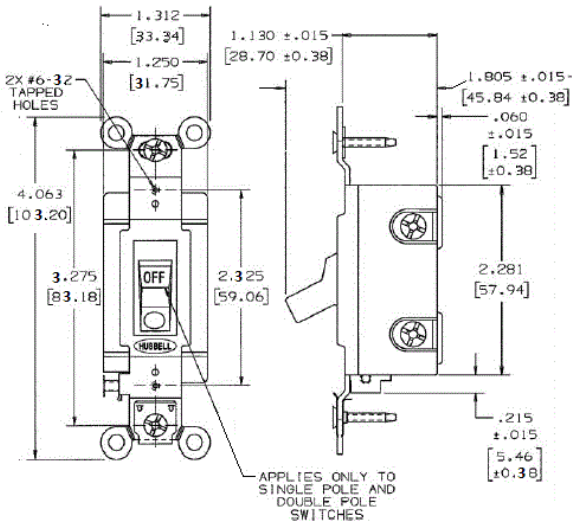

Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

