



ESC Series

Steel Combination Unit

Project/Location:

Contractor:

Date:


Prepared by:

FEATURES

- Universal mounting: end, wall or ceiling
- Meets or exceeds CSA 22.2 No.141-10 standard for unit equipment and pictogram Exit Signs
- Legend illuminated by long-life white LED's
- Sealed, maintenance-free, 6V or 12V Lead-Calcium battery
- Remote load capacity: 80W up to 560' of egress illumination when using LED remote heads

DIMENSIONS

Dimensions are approximate and subject to change.

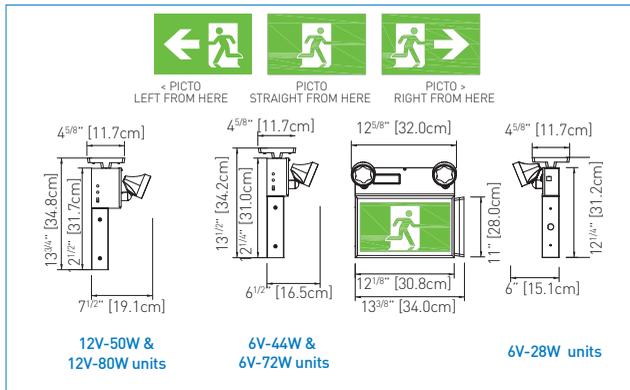

TYPICAL SPECIFICATION

Supply and install **Emergi-Lite® ESC Series** combination emergency light battery unit and pictogram Exit Sign. The unit shall be made of solid steel sheet metal and be suitable for universal mounting: wall, end, or ceiling. The legend housing shall have a maximum depth of 2-1/8". The legend face plate(s) shall be constructed of robust clear polycarbonate panel(s) with an opaque border coloured factory-white. The light source shall be white light-emitting diodes (LED) and shall provide even illumination in normal and emergency operation. The power pack shall include one circuit board with test switch and pilot light for battery charger and legend LED driver. The unit shall include one 6V or 12V, maintenance-free, sealed Lead-Calcium battery and shall provide minimum 30 minutes of emergency lighting upon AC power failure. The electrical power available for emergency lights shall be 28W or up to 72W, for 6V and 50W or up to 80W for 12V, as specified. The emergency heads shall require no tools to adjust and aim. The equipment shall meet or exceed the requirements of CSA 22.2 No.141-10 standard.

The equipment shall be **Emergi-Lite®** Model: _____.

WIRE GUARDS

460.0081-E	Wall mount
460.0060-E	Ceiling mount



POWER CONSUMPTION

MODEL	AC SPECS	EMERGENCY POWER AVAILABLE FOR LAMPS					
		30MIN	1H00	1H30	2H00	4H00	
Pictogram Module	120/347VAC	Less than 1.5W	-	-	-	-	-
ESC28		0.13 / 0.05 A	28	16	12	9	-
ESC44			44	26	18	15	7
ESC72			72	42	30	24	12
ESC-1250		0.25 / 0.09 A	50	29	21	16	8
ESC-1280			80	46	32	27	13

ORDERING INFORMATION

SERIES	POWER EM. LIGHTS	HOUSING COLOUR	HEADS	HEAD STYLE AND WATTAGE	OPTIONS
ESC= pictogram steel combo exit sign	28= 6V-28W 44= 6V-44W 72= 6V-72W* 1250= 12V-50W* 1280= 12V-80W*	W= factory white B= black	Blank= no heads 1= one head 2= two heads	Blank= no heads LA= MR16 LED, 6V-4W LG= MR16 LED, 12V-4W LI= MR16 LED, 12V-5W LJ= MR16 LED, 12V-6W M= mini tungsten, 12V-9W, wedge base MQ= mini halogen, 12V-8W, quartz bi-pin MQ12= mini halogen, 12V-12W, quartz bi-pin MI= MR16 halogen, 6V-6W MJ= MR 16 halogen, 6V-10W MK= MR16 halogen, 12V-12W MA= MR16 halogen, 12V-20W MB= MR16 halogen, 12V-35W* MR= MR16 high-output, 12V-35W*	Blank= 120/347VAC input -TP= tamper-proof screws* -2= 120/277VAC input DF= double face sign D3= time delay (15 minutes) NEX= NEXUS® system interface** NEXRF= wireless NEXUS® system interface** U= auto-diagnostics*** UN= auto-diagnostics, non audible***
	*Not available with NEX & NEXRF			*MB & MR are using EL150 type heads	* Bit ordered separately: 990.0119-E ** Max. 44W; consult your sales representative

EXAMPLE: ESC28W2LA