

## MF 10/5 MC NE WS


**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

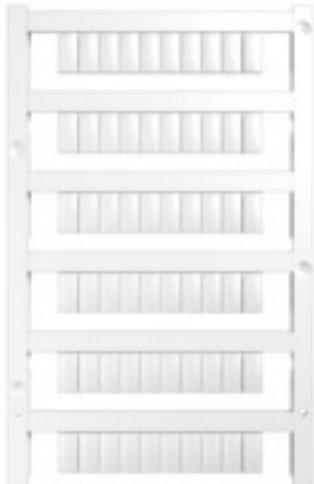

Similar to illustration

MultiFit is the Weidmüller marker system used for other makes of terminals. Similar to the Weidmüller Dekafix, the markers of the MultiFit family are available ready-for-use with standard printing.

We recommend to carry out a test with sample markers on the terminals used when using MultiFit for the first time.

- One marker, suitable for different makes of terminals.
- Ready-to-use markers with standard printing
- Blank markers for printing with the PrintJet CONNECT or Plotter
- Delivery of individually printed markers according to customer CAE data or specifications
- One marking system for all applications

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.



### General ordering data

Version	MultiFit, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Phoenix, Wieland, Legrand, Telemecanique, Entrelec, white
Order No.	<a href="#">1677160000</a>
Type	MF 10/5 MC NE WS
GTIN (EAN)	4008190475505
Qty.	600 pièce(s)
compatible printer	<a href="#">2715590000</a> <a href="#">2438520000</a> <a href="#">2438510000</a>

## MF 10/5 MC NE WS

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Caractéristiques techniques

## Dimensions and weights

Height	10 mm	Height (inches)	0,394 inch
Width	5 mm	Width (inches)	0,197 inch
Net weight	0,18 g		

## Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

## General data

Application/manufacturer	Phoenix, Wieland, Legrand, Telemecanique, Entrelec		
Colour	white		
Halogen	No		
Material	Polyamide 66		
Material colour according to resistance code	9		
Number of markers per combination	1 MultiCard = Terminal marker		
Number of markers per packaging unit	Form of supply	MultiCard	
Operating temperature range	-40...100 °C		
Operating temperature range, max.	100 °C		
Operating temperature range, min.	-40 °C		
Printed characters	neutral		
Type of printing	neutral		
UL 94 flammability rating	V-2		
Width	5 mm		

## Connector markers

Pitch in mm (P)	5 mm
-----------------	------

## Classifications

ETIM 6.0	EC000761	ETIM 7.0	EC000761
ETIM 8.0	EC000761	ETIM 9.0	EC000761
ECLASS 9.0	27-14-11-37	ECLASS 9.1	27-14-11-37
ECLASS 10.0	27-14-11-37	ECLASS 11.0	27-28-11-01
ECLASS 12.0	27-28-11-01	ECLASS 13.0	27-28-11-01
ECLASS 14.0	27-28-11-01		

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

## Approvals

ROHS	Conform
------	---------

**MF 10/5 MC NE WS**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Caractéristiques techniques****Downloads**

Engineering Data	<a href="#">CAD data – 20993_MF_10-5_MC_DXF.dxf</a> <a href="#">CAD data – STEP</a>
Product Change Notification	<a href="#">Technical change to MultiCard material - DE</a> <a href="#">Technical change to MultiCard material - EN</a> <a href="#">MultiCard Material modification</a> <a href="#">MultiCard Material Modifikation</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>

**Fiche de données**

**MF 10/5 MC NE WS**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Dessins**



**Drawing**

