

1P

Arktite® Heavy Duty Circuit Breaking Receptacle Assemblies and Housings

NEMA 4 Watertight

60 A, 600 VAC/250 VDC, 50† – 400 hertz

Ordering Information:



Receptacle Assembly



Receptacle



Receptacle Housing Only




Mating Plug



Mating Connector

With AJ Back Boxes and Angle Adapters				With ARE Back Boxes	Receptacle Housing Only				
Description	Hub Size (In.)	Spring Door Cat. #	Threaded Cap Only Cat. #	Spring Door Cat. #	Spring Door Cat. #	Threaded Cap Only Cat. #	Cable Dia.	Cat. #	Cat. #
Style 1									
2-wire, 2-pole }	1	AREA6213		ARE6213	AR621	AR627	0.50 to 1.45	APJ6275	APR6255
	1¼	AREA6214		ARE6214					
3-wire, 3-pole }	1	AREA6313		ARE6313	AR631	AR637	0.50 to 1.45	APJ6375	APR6355
	1¼	AREA6314		ARE6314					
4-wire, 4-pole }	1¼	AREA6414		ARE6414	AR641	AR647	0.50 to 1.45	APJ6475	APR6455
	1½	AREA6415		ARE6415					
5-wire, 5-pole }	1¼		AREA6574			AR657	0.50 to 1.45	APJ6575	
	1½		AREA6575						
Style 2									
2-wire, 3-pole }	1	AREA6323		ARE6323	AR632	AR638	0.50 to 1.45	APJ6385	APR6365
	1¼	AREA6324		ARE6324					
3-wire, 4-pole }	1¼	AREA6424		ARE6424	AR642	AR648	0.50 to 1.45	APJ6485	APR6465
	1½	AREA6425		ARE6425					
4-wire, 5-pole }	1¼		AREA6584			AR658	0.75 to 1.45	APJ6585	APR6565
	1½		AREA6585						APR6567

Dimensions (In Inches):

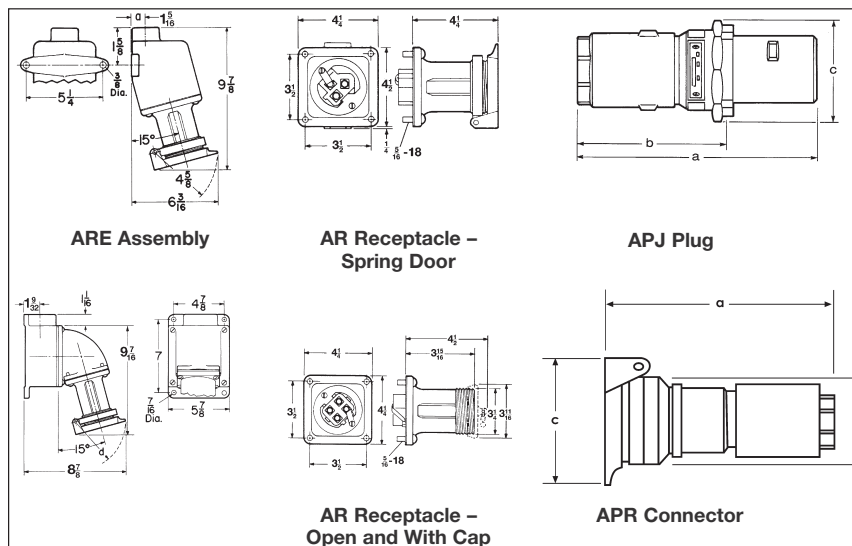

Config.	Plug			Connector		
	a	b	c	a	b	c
2P or 3P	8 1/2	5 3/4	3 5/8	6 1/2	3 7/8	2 15/16
4P	8 1/2	5 13/16	3 3/4	8 1/4	3 7/8	2 15/16
5P	9	6 3/16	4 7/16	8 1/4	3 7/8	3 1/4

†For use on systems less than 60 hertz the receptacles, plugs and connectors are for disconnect use only.