


8501XUDO08V63
NEMA Control Relay, Type X, utility, 10A resistive
at 600 VAC, 8 normally closed contacts, 125 VDC
coil

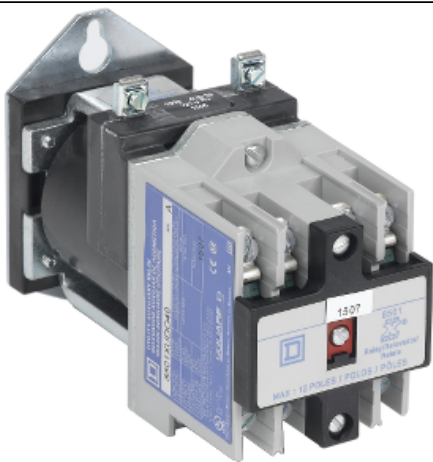

Principal

Range	8501X
Relay Type	Utility
Product	Relais
Current Rating	10 A AC 5 A DC
Contact Configuration	8 "O" 8 standard contact cartridges
Number of Poles	8P
Coil Voltage	125 V DC
Voltage Rating	250 V DC
Mounting Type	Panneau
Operating Temperature	-40...71 °C
Electrical Connection	Borniers à vis-étrier
Certifications	Listé UL CE CSA
Operating Time	37 ms - déclenchement 21 ms - perte de niveau

Emballage

Poids de l'emballage (Kg)	1,043 kg
---------------------------	----------

Offre de la durabilité

Statut environnemental de l'offre	Produit Green Premium
Régulation REACH	Déclaration REACH
Directive RoHS UE	Conformité pro-active (Produit en dehors du scope légal RoHS UE) Déclaration RoHS UE

Sans mercure	Oui
Information sur les exemptions RoHS	Oui
Régulation RoHS Chine	Déclaration RoHS pour la Chine
Profil environnemental	Profil environnemental du Produit
Profil de circularité	Informations de fin de vie

Garantie contractuelle

Garantie	18 months
----------	-----------