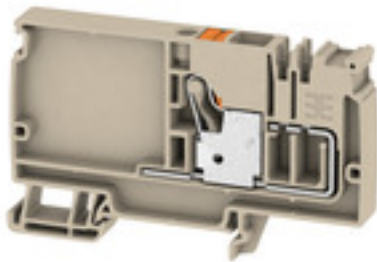


**AAP12 10 LO OR****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

The unique modular concept can be tailored to every type of machine. The potential distribution terminal blocks AAP are successful thanks to their uniform design with two possible constructions – alternating or grouped. In the grouped structure of the control voltage distribution, the potentials are located on different terminal blocks and thus form entire potential blocks.

**General ordering data**

|            |                                                                        |
|------------|------------------------------------------------------------------------|
| Version    | Supply terminal, PUSH IN, 10 mm <sup>2</sup> , 800 V, 57 A, dark beige |
| Order No.  | <a href="#">2503900000</a>                                             |
| Type       | AAP12 10 LO OR                                                         |
| GTIN (EAN) | 4050118517576                                                          |
| Qty.       | 20 pc(s).                                                              |

## AAP12 10 LO OR

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                          |            |                |            |
|--------------------------|------------|----------------|------------|
| Depth                    | 53.5 mm    | Depth (inches) | 2.106 inch |
| Depth including DIN rail | 54 mm      | Height         | 89 mm      |
| Height (inches)          | 3.504 inch | Width          | 10 mm      |
| Width (inches)           | 0.394 inch | Net weight     | 25.342 g   |

## Temperatures

|                                  |                |                                  |        |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature              | -25 °C...55 °C | Continuous operating temp., min. | -60 °C |
| Continuous operating temp., max. | 130 °C         |                                  |        |

## Material data

|                                |        |                           |            |
|--------------------------------|--------|---------------------------|------------|
| Material                       | Wemid  | Colour                    | dark beige |
| Colour of operational elements | orange | UL 94 flammability rating | V-0        |

## Rating data IECEx/ATEX

|                                |                    |                                 |                    |
|--------------------------------|--------------------|---------------------------------|--------------------|
| Certificate No. (ATEX)         | TUEV17ATEX8030U    | Certificate No. (IECEX)         | IECEXTUR17.0015U   |
| Max. voltage (ATEX)            | 690 V              | Current (ATEX)                  | 45 A               |
| Wire cross section max. (ATEX) | 10 mm <sup>2</sup> | Max. voltage (IECEX)            | 690 V              |
| Current (IECEX)                | 45 A               | Wire cross section max. (IECEX) | 10 mm <sup>2</sup> |
| Marking EN 60079-7             | Ex ec II C Gc      | Ex 2014/34/EU label             | II 2 G D           |

## System specifications

|                               |     |                                     |       |
|-------------------------------|-----|-------------------------------------|-------|
| End cover plate required      | Yes | Number of potentials                | 1     |
| Number of levels              | 1   | Number of clamping points per level | 1     |
| Number of potentials per tier | 1   | Levels cross-connected internally   | No    |
| PE connection                 | No  | Rail                                | TS 35 |
| N-function                    | No  | PE function                         | No    |
| PEN function                  | No  |                                     |       |

## Additional technical data

|                          |         |                     |       |
|--------------------------|---------|---------------------|-------|
| Explosion-tested version | Yes     | Installation advice | Rail  |
| Open sides               | right   | Snap-on             | No    |
| Type of fixing           | Snap-on | Type of mounting    | TS 35 |
| With snap-in pegs        | No      |                     |       |

## CSA rating data

|                               |                 |                               |       |
|-------------------------------|-----------------|-------------------------------|-------|
| Certificate No. (CSA)         | 200039-70089609 | Current size B (CSA)          | 51 A  |
| Current size C (CSA)          | 51 A            | Current size D (CSA)          | 5 A   |
| Voltage size B (CSA)          | 600 V           | Voltage size C (CSA)          | 600 V |
| Voltage size D (CSA)          | 600 V           | Wire cross section max. (CSA) | 6 AWG |
| Wire cross section min. (CSA) | 20 AWG          |                               |       |

## Conductors for clamping (additional connection)

Connection type, additional connection PUSH IN

## Conductors for clamping (rated connection)

|                      |                    |
|----------------------|--------------------|
| Blade size           | 1.0 x 5.5 mm       |
| Clamping range, max. | 16 mm <sup>2</sup> |

Creation date November 26, 2024 1:02:57 PM CET

## AAP12 10 LO OR

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|                                                                                         |                                        |         |                      |
|-----------------------------------------------------------------------------------------|----------------------------------------|---------|----------------------|
| Clamping range, min.                                                                    | 0.5 mm <sup>2</sup>                    |         |                      |
| Connection cross-section, finely stranded, max.                                         | 16 mm <sup>2</sup>                     |         |                      |
| Connection cross-section, stranded, max.                                                | 16 mm <sup>2</sup>                     |         |                      |
| Connection cross-section, stranded, min.                                                | 0.5 mm <sup>2</sup>                    |         |                      |
| Connection direction                                                                    | top                                    |         |                      |
| Gauge to IEC 60947-1                                                                    | A6                                     |         |                      |
| Number of connections                                                                   | 2                                      |         |                      |
| Stripping length                                                                        | 18 mm                                  |         |                      |
| Tube length for twin wire-end ferrule                                                   | Cross-section for conductor connection | min.    | 0.75 mm <sup>2</sup> |
|                                                                                         |                                        | max.    | 1 mm <sup>2</sup>    |
|                                                                                         | Tube length                            | nominal | 18 mm                |
|                                                                                         |                                        |         |                      |
|                                                                                         | Cross-section for conductor connection | min.    | 1.5 mm <sup>2</sup>  |
|                                                                                         |                                        | max.    | 4 mm <sup>2</sup>    |
| Tube length for wire-end ferrule with plastic collar DIN 46228/4                        | Tube length                            | min.    | 12 mm                |
|                                                                                         |                                        | max.    | 18 mm                |
|                                                                                         | Cross-section for conductor connection | min.    | 1.5 mm <sup>2</sup>  |
|                                                                                         |                                        | max.    | 4 mm <sup>2</sup>    |
|                                                                                         | Tube length                            | min.    | 18 mm                |
|                                                                                         |                                        | max.    | 10 mm <sup>2</sup>   |
| Tube length for wire-end ferrule without plastic collar DIN 46228/1                     | Tube length                            | min.    | 12 mm                |
|                                                                                         |                                        | max.    | 18 mm                |
|                                                                                         | Cross-section for conductor connection | min.    | 1.5 mm <sup>2</sup>  |
|                                                                                         |                                        | max.    | 10 mm <sup>2</sup>   |
|                                                                                         | Tube length                            | nominal | 18 mm                |
|                                                                                         |                                        |         |                      |
| Twin wire-end ferrules, max.                                                            | 4 mm <sup>2</sup>                      |         |                      |
| Twin wire-end ferrules, min.                                                            | 0.5 mm <sup>2</sup>                    |         |                      |
| Type of connection                                                                      | PUSH IN                                |         |                      |
| Wire connection cross section AWG, max.                                                 | AWG 6                                  |         |                      |
| Wire connection cross section AWG, min.                                                 | AWG 20                                 |         |                      |
| Wire connection cross section, finely stranded, max.                                    | 10 mm <sup>2</sup>                     |         |                      |
| Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 10 mm <sup>2</sup>                     |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 10 mm <sup>2</sup>                     |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, solid core, max.                                         | 10 mm <sup>2</sup>                     |         |                      |
| Wire connection cross-section, solid core, min.                                         | 0.5 mm <sup>2</sup>                    |         |                      |

## AAP12 10 LO OR

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## General

|                                         |                                  |                                         |       |
|-----------------------------------------|----------------------------------|-----------------------------------------|-------|
| Installation advice                     | Rail                             | Rail                                    | TS 35 |
| Standards                               | In accordance with IEC 60947-7-1 | Wire connection cross section AWG, max. | AWG 6 |
| Wire connection cross section AWG, min. | AWG 20                           |                                         |       |

## Rating data

|                                              |                    |                                 |                                  |
|----------------------------------------------|--------------------|---------------------------------|----------------------------------|
| Rated cross-section                          | 10 mm <sup>2</sup> | Rated voltage                   | 800 V                            |
| Rated DC voltage                             | 800 V              | Rated current                   | 57 A                             |
| Current at maximum wires                     | 57 A               | Standards                       | In accordance with IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 0.56 mΩ            | Rated impulse withstand voltage | 8 kV                             |
| Power loss in accordance with IEC 60947-7-x  | 1.82 W             | Pollution severity              | 3                                |
| Surge voltage category                       | III                |                                 |                                  |

## UL rating data

|                                            |        |                                            |       |
|--------------------------------------------|--------|--------------------------------------------|-------|
| Certificate No. (cURus)                    | E60693 | Conductor size Factory wiring max. (cURus) | 6 AWG |
| Conductor size Factory wiring min. (cURus) | 20 AWG | Conductor size Field wiring max. (cURus)   | 6 AWG |
| Conductor size Field wiring min. (cURus)   | 20 AWG | Current size B (cURus)                     | 51 A  |
| Current size C (cURus)                     | 51 A   | Current size D (cURus)                     | 5 A   |
| Voltage size B (cURus)                     | 600 V  | Voltage size C (cURus)                     | 600 V |
| Voltage size D (cURus)                     | 600 V  |                                            |       |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000897    | ETIM 7.0    | EC000897    |
| ETIM 8.0    | EC000897    | ETIM 9.0    | EC000897    |
| ECLASS 9.0  | 27-14-11-20 | ECLASS 9.1  | 27-14-11-20 |
| ECLASS 10.0 | 27-14-11-20 | ECLASS 11.0 | 27-14-11-20 |
| ECLASS 12.0 | 27-14-11-20 | ECLASS 13.0 | 27-25-01-01 |
| ECLASS 14.0 | 27-25-01-01 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## AAP12 10 LO OR

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Approvals

Approvals



|                         |            |
|-------------------------|------------|
| ROHS                    | Conform    |
| UL File Number Search   | UL Website |
| Certificate No. (cURus) | E60693     |

## Downloads

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">Attestation of Conformity</a><br><a href="#">IECEX Certificate</a><br><a href="#">DE PT0205 2017 1010 047 ISSUE01.pdf</a><br><a href="#">ATEX Certificate</a><br><a href="#">CB Test Certificate</a><br><a href="#">CB Certificate</a><br><a href="#">DNVGL certificate</a><br><a href="#">CCC Ex Certificate</a><br><a href="#">20-AV4BO-0271U</a><br><a href="#">DNV Certificate</a><br><a href="#">UKCA declaration of conformity</a><br><a href="#">Confirmation of Standards EN 45545-2_2020-10</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Tender specification                        | <a href="#">Klippon® Connect 2503900000 DE</a><br><a href="#">Klippon® Connect 2503900000 EN</a>                                                                                                                                                                                                                                                                                                                                                                                                                     |
| User Documentation                          | <a href="#">NTI AAP12</a><br><a href="#">StorageConditionsTerminalBlocks</a><br><a href="#">AAP Terminal Blocks for control voltage distribution</a><br><a href="#">User Manual AXC 1.5-16</a>                                                                                                                                                                                                                                                                                                                       |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## AAP12 10 LO OR

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

