

# XAPD1501

Die cast empty control station, Harmony XAP, XB2 SL, zinc alloy, grey, M20, 1 cut out 22mm, 80x80x77mm, UL cULus



## Main

|                               |  |
|-------------------------------|--|
| Range of Product              | Harmony XAP  |
| Product or Component Type     | Die-cast empty control station   |
| Device short name             | XAPD   |
| Product destination           | For Ø 22 mm control and signalling units   |
| Product front plate size      | 80 x 80 mm   |
| Usable depth                  | 2.93 in (74.5 mm)  |
| Number of cut-out             | 1 cut-out  |
| Colour of base of enclosure   | Grey RAL 7035)   |
| Colour of cover               | Grey RAL 7035)   |
| Material                      | Die cast zinc  |
| Sale per indivisible quantity | 1  |
| IP degree of protection       | IP65 EN/IEC 60529 and EN/IEC 60947-5-1<br>IP66 EN/IEC 60529 and EN/IEC 60947-5-1<br>IP69 EN/IEC 60529 and EN/IEC 60947-5-1 |

## Complementary

|                           |                        |
|---------------------------|------------------------|
| Number of vertical rows   | 1                      |
| Number of horizontal rows | 1                      |
| Cut-out dimensions        | Ø 22 mm                |
| Control station type      | Metal                  |
| Cable entry               | 2 x cable gland ISO    |
| Thread type               | M20 x 1.5              |
| CAD overall width         | 3.15 in (80 mm)        |
| CAD overall height        | 3.15 in (80 mm)        |
| CAD overall depth         | 3.03 in (77 mm)        |
| Net Weight                | 1.33 lb(US) (0.605 kg) |

## Environment

|                                       |  |
|---------------------------------------|--|
| Protective treatment                  | TC   |
| Ambient Air Temperature for Storage   | -40...158 °F (-40...70 °C)                   |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C)                   |
| Electrical shock protection class     | Class I IEC 61140                            |
| Degree of protection                  | UL type 4 UL 50 E<br>UL type 4X UL 50 E      |
| IK degree of protection               | IK07 IEC 62262                               |
| Resistance to chemical agents         | Special treatment can be obtained on request |
| Product Certifications                | UL[RETURN]cULus[RETURN]EAC                   |

## Ordering and shipping details

|                   |                     |
|-------------------|---------------------|
| Category          | 22475-WALL STATIONS |
| Discount Schedule | CS2                 |
| GTIN              | 3389110001044       |
| Returnability     | Yes                 |


## Packing Units

|                              |                            |
|------------------------------|----------------------------|
| Unit Type of Package 1       | PCE                        |
| Number of Units in Package 1 | 1                          |
| Package 1 Height             | 3.70 in (9.400 cm)         |
| Package 1 Width              | 3.35 in (8.500 cm)         |
| Package 1 Length             | 3.54 in (9.000 cm)         |
| Package 1 Weight             | 27.62 oz (783.000 g)       |
| Unit Type of Package 2       | S02                        |
| Number of Units in Package 2 | 12                         |
| Package 2 Height             | 5.91 in (15.000 cm)        |
| Package 2 Width              | 11.81 in (30.000 cm)       |
| Package 2 Length             | 15.75 in (40.000 cm)       |
| Package 2 Weight             | 21.08 lb(US) (9.563 kg)    |
| Unit Type of Package 3       | P06                        |
| Number of Units in Package 3 | 192                        |
| Package 3 Height             | 29.53 in (75.000 cm)       |
| Package 3 Width              | 23.62 in (60.000 cm)       |
| Package 3 Length             | 31.50 in (80.000 cm)       |
| Package 3 Weight             | 365.47 lb(US) (165.776 kg) |

## Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| REACH free of SVHC         | Yes   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)  |
| Mercury free               | Yes   |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>  |
| RoHS exemption information | <a href="#">Yes</a>   |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |
| Circularity Profile        | No need of specific recycling operations  |

Dimensions and Fixing

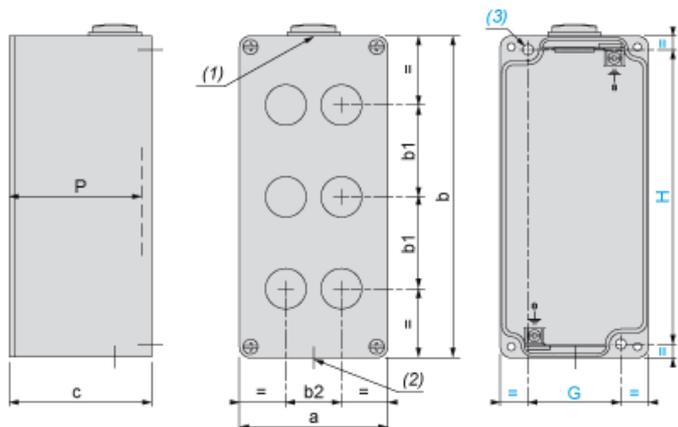

(1): 1 hole, with blanking plug (protrusion 6 mm/0.24 in.), for cable gland ISO M20 x 1.5


(2): 1 hole, without blanking plug, for cable gland ISO M20 x 1.5

(3): 2 x Ø 5.6 mm/0.22 in. holes, depth 19 mm/0.75 in.

P: Usable depth

| a  |      | b  |      | c  |      | G  |      | H  |      | P    |      |
|----|------|----|------|----|------|----|------|----|------|------|------|
| mm | in.  | mm   | in.  |
| 80 | 3.15 | 80 | 3.15 | 77 | 3.03 | 50 | 1.97 | 65 | 2.56 | 74.5 | 2.93 |

1 hole in the center, Cut-out interaxis 22.5 mm ±0.2 mm / 0.885 in. ± 0.0078 in. dimensions (vertical mounting)



b1 Vertical interaxis: In the center of the box

b2 Horizontal interaxis: In the center of the box